

IFURNITURE HARDWARE

潍坑铭坤国际贸易有限公司

WeifangMingkuninternationaltradeCo.t

FOCUS PRODUCTS CATALOG



微信Weixin



Whatsapp

公司地址：山东省潍坊市坊子区方安街道河南郎君村 201 号

CompanyAdd.: No. 201, Henanlangjun Village, Fang'an
Sub-district, Fangzi District, Weifang City,
Shandong Province, P.R. China

<http://www.wfmingkun.com>



Email: thetiet40@gmail.com/
18754002477@163.com



SALES NETWORK



	A	铰链 HINGE	01-44
	B	滑轨 SLIDE	45-68
	C	隐藏轨 CONCEALED SLIDE	69-76
	D	骑马抽 RIDING DRAWER	77-80
	E	气撑 GAS SPRING	81-84
	F	配件 FITTINGS	85-88
	G	拉手 HANDLE	89-92

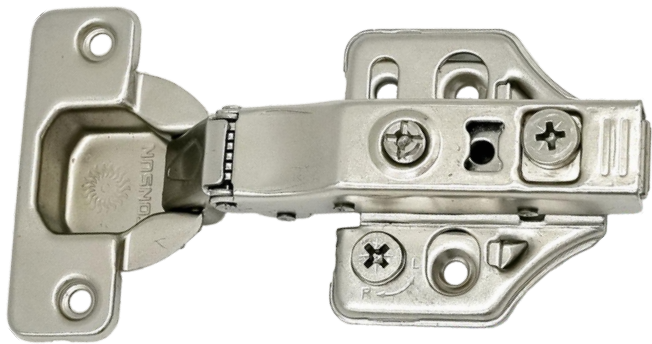


■ 3D零角度二段力缓冲快装铰链

材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm

■ 3D Soft Closing Hinge Clip-on, ZERO ANGLE, Two way

Material: steel
Angle of opening: 103°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

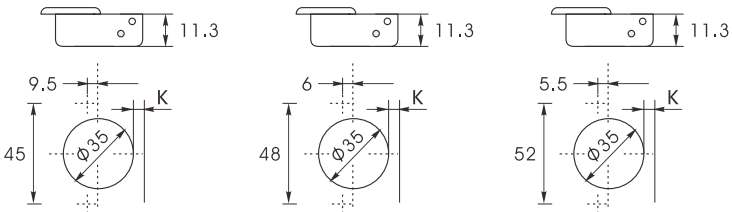

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay




$H = 14 + K - D$

half overlay



$H = 5 + K - D$

inset


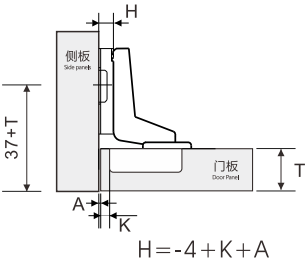


$H = -4 + K + A$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

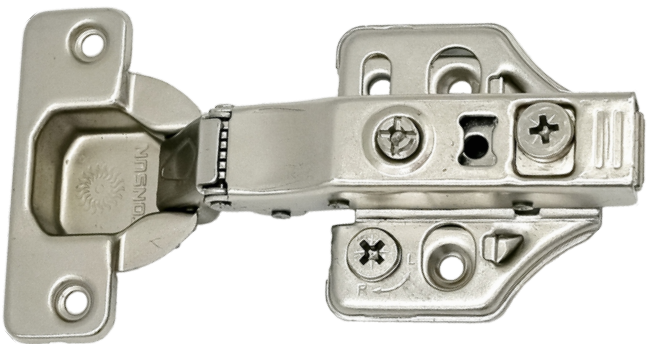


■ 3D零角度一段力缓冲快装铰链

材料：冷轧钢
开启角度：100°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm

■ 3D Soft Closing Hinge Clip-on, ZERO ANGLE, one way

Material: steel
Angle of opening: 100°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

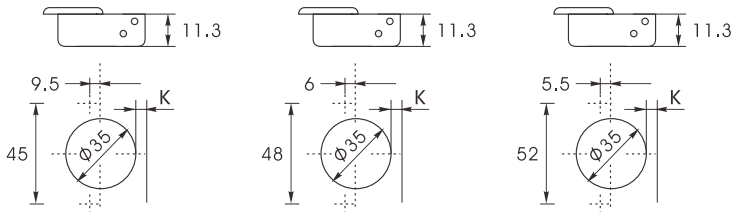

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay




$H = 14 + K - D$

half overlay



$H = 5 + K - D$

inset





$H = -4 + K + A$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

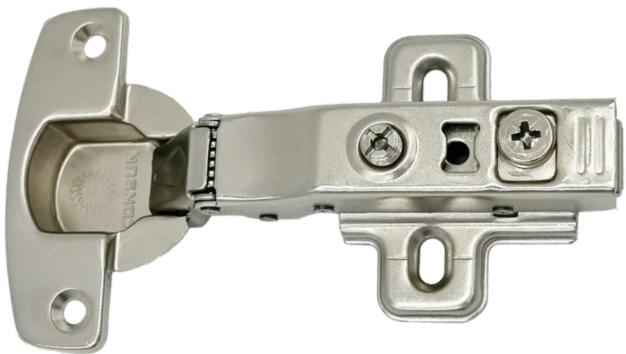


■ 2D零角度二段力缓冲快装铰链

孔距：52mm
材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm

■ 2D Soft Closing Hinge Clip-on, Zero Angle, Two Way

Hole distance: 52MM
Material: steel
Angle of opening: 103°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness: 14-21mm

铰杯种类 Hinge cup types

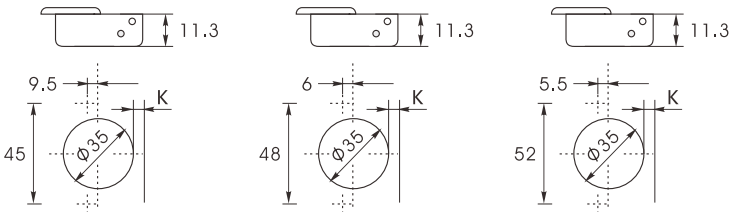

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel

T=门板厚度
T=Door panel thickness


full overlay

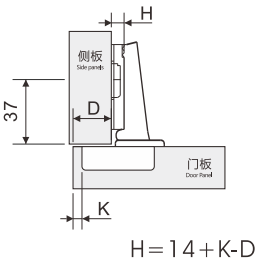

$H = 14 + K - D$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


half overlay



$H = 5 + K - D$


$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

inset



$H = -4 + K + A$

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1




■ 3D一段力缓冲快装铰链

材料：304/201
开启角度：100°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm

■ Stainless steel soft closing hinge Clip-on , adjustable arm, One way/ two way optional

Material: 304/201
Angle of opening: 100°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

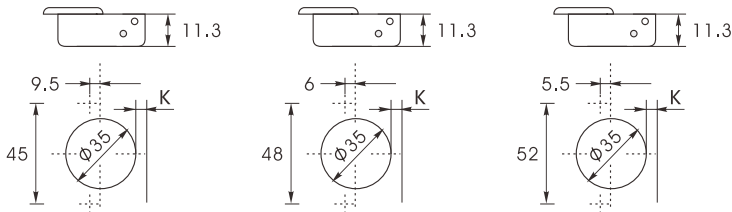

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel

T=门板厚度
T=Door panel thickness


full overlay



$H = 14 + K - D$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


half overlay

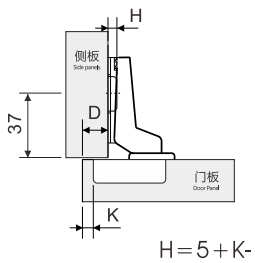

$H = 5 + K - D$



$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

inset




$H = -4 + K + A$

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

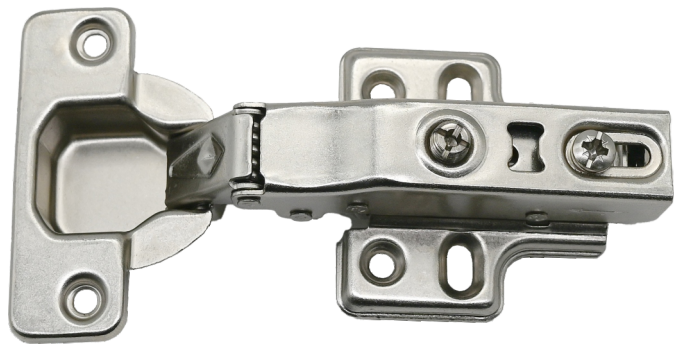


- 快装缓冲铰链
材料：冷轧钢
开启角度：100°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Soft closing hinge Clip-on, one way
Material:steel
Angle of opening: 100°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

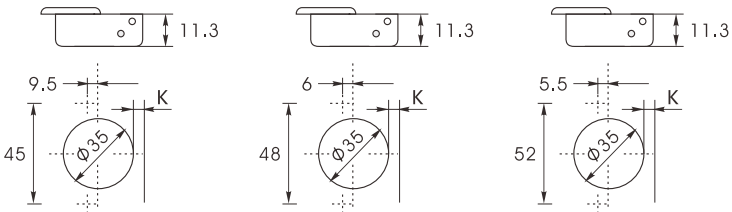



H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

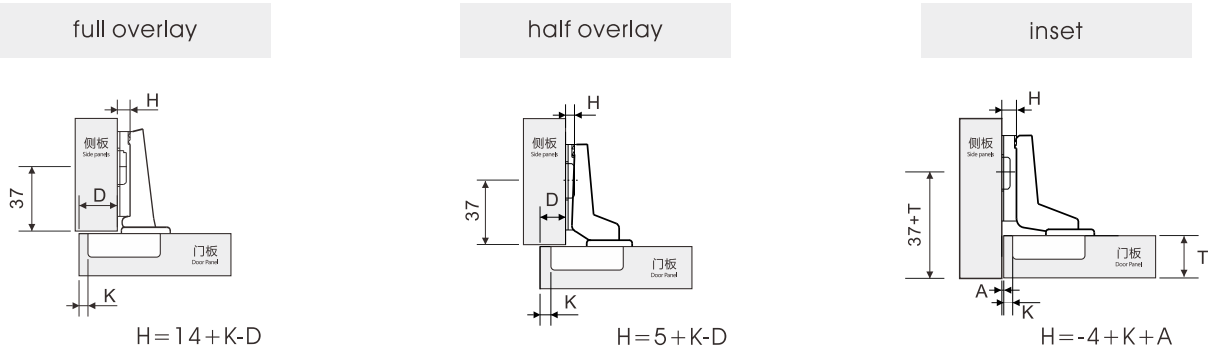

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

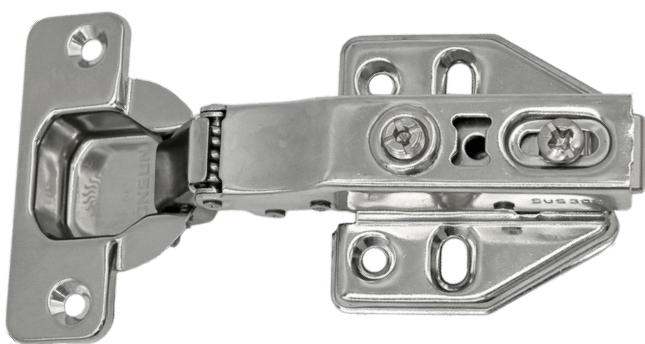


- 不锈钢快装缓冲铰链,一段力/二段力
材料：304/201
开启角度：100°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm
- Stainless steel soft closing hinge
Clip-on , One way/ two way optional
Material:304/201
Angle of opening: 100°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

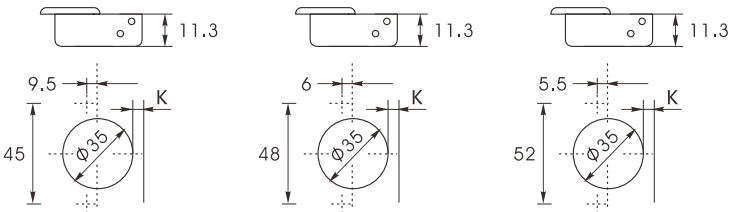



H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

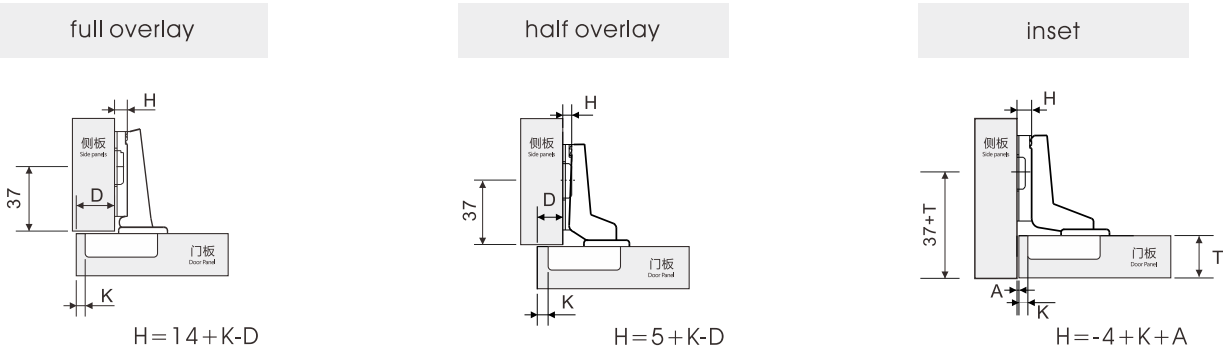

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

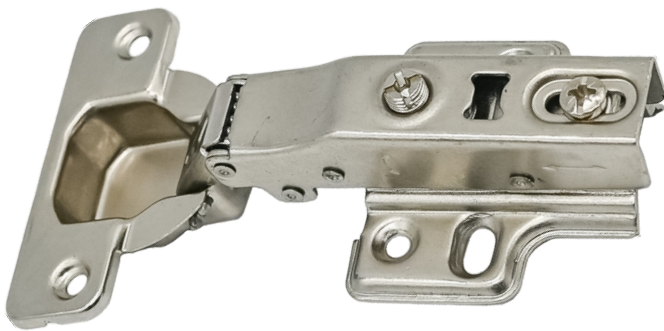


- 固装缓冲铰链
材料：冷轧钢
开启角度：100°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Screw-on soft closing hinge
Material:steel
Angle of opening: 100°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

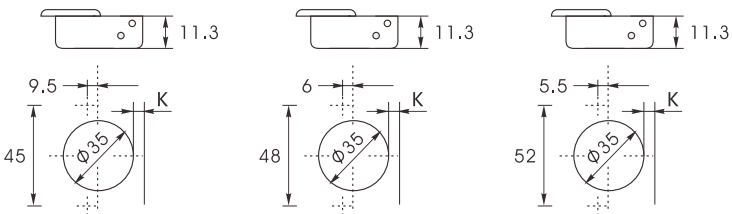



H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

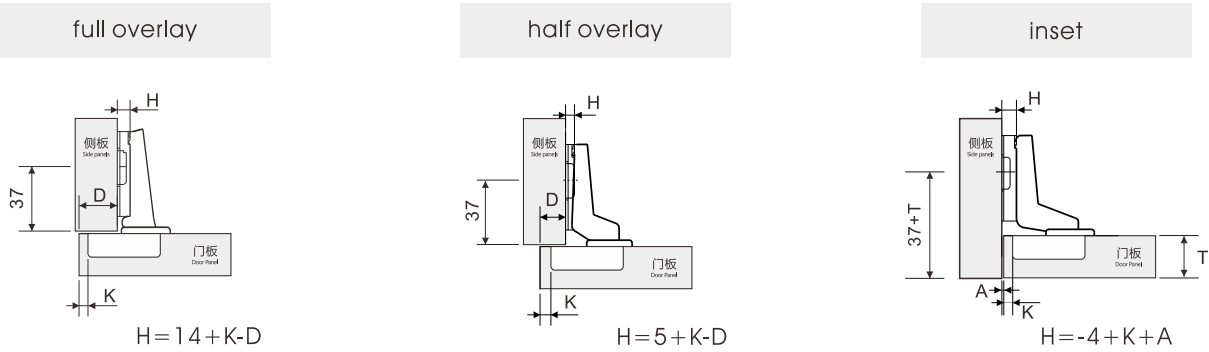

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

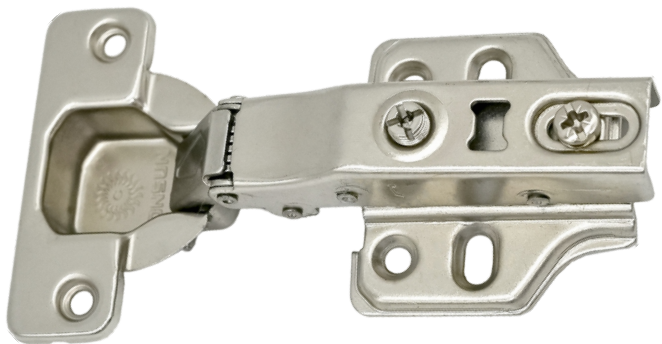


- 固装二段力零角度缓冲铰链
材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm
- Screw-on Zero angle Two way Soft closing hinge
Material:Steel
Angle of opening: 103°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

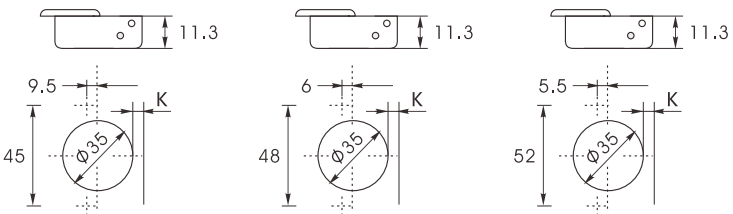



H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

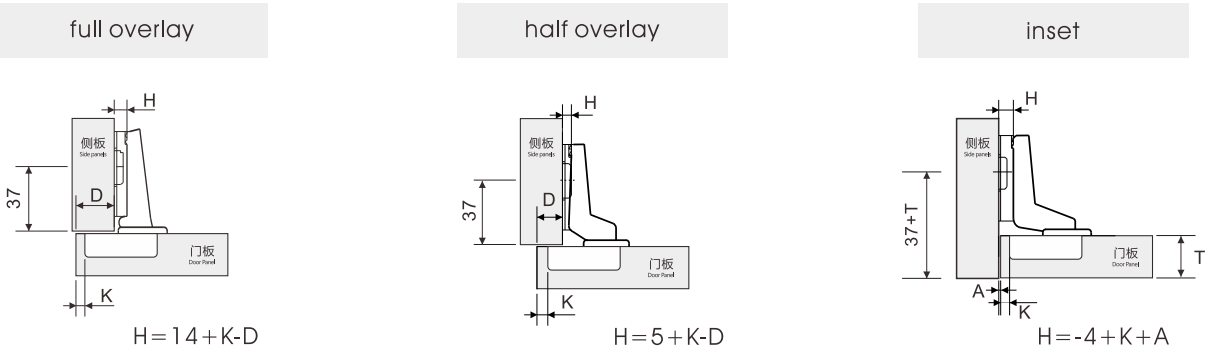

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

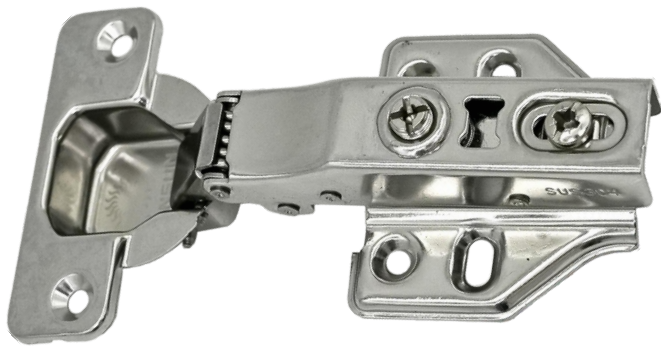


- 不锈钢固装缓冲铰链
材料: 304/201
开启角度: 103°
铰杯深度: 11.3mm
铰杯直径: 35mm
面板(K)尺寸: 3-7mm
适用门板厚度: 14-21mm
- Soft closing hinge, stainless steel, Screw-on
Material: 304/201
Angle of opening: 103°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness: 14-21mm

铰杯种类 Hinge cup types

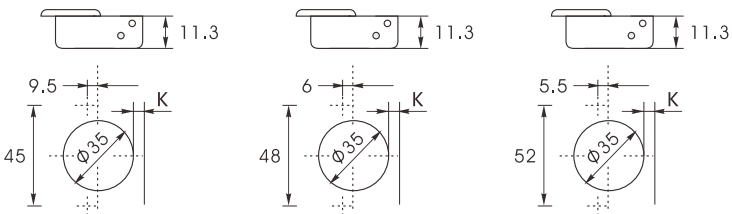



H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

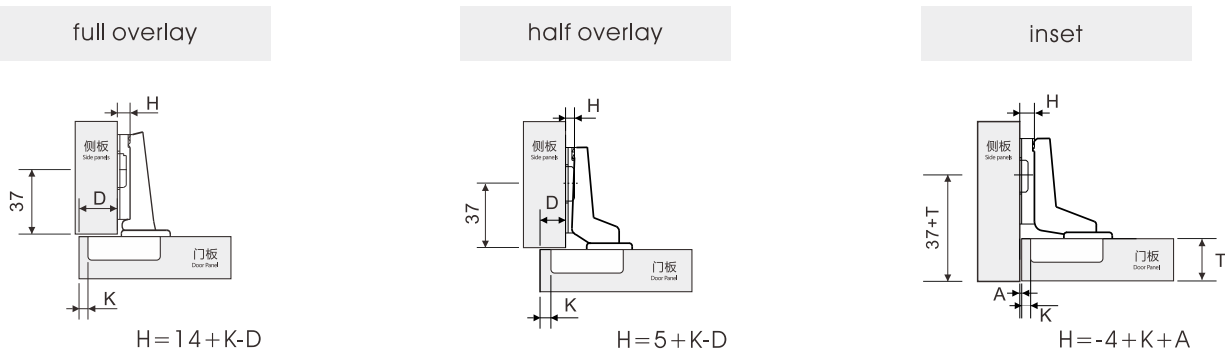

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

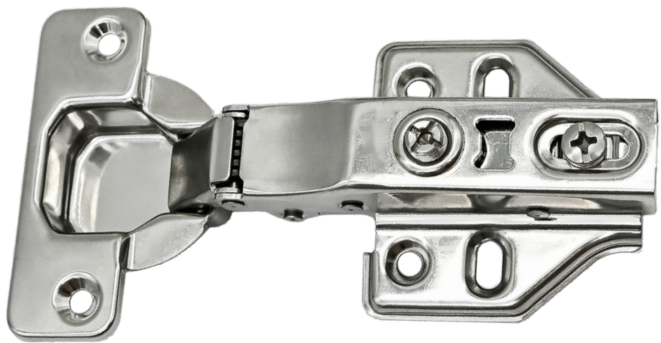


- 不锈钢固装二段力缓冲铰链
材料: 304/201
开启角度: 103°
铰杯深度: 11.3mm
铰杯直径: 35mm
面板(K)尺寸: 3-7mm
适用门板厚度: 14-21mm
- Soft closing hinge, stainless steel, Screw-on, two way
Material: 304/201
Angle of opening: 103°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

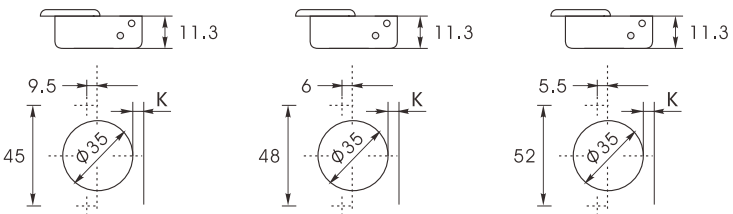


H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

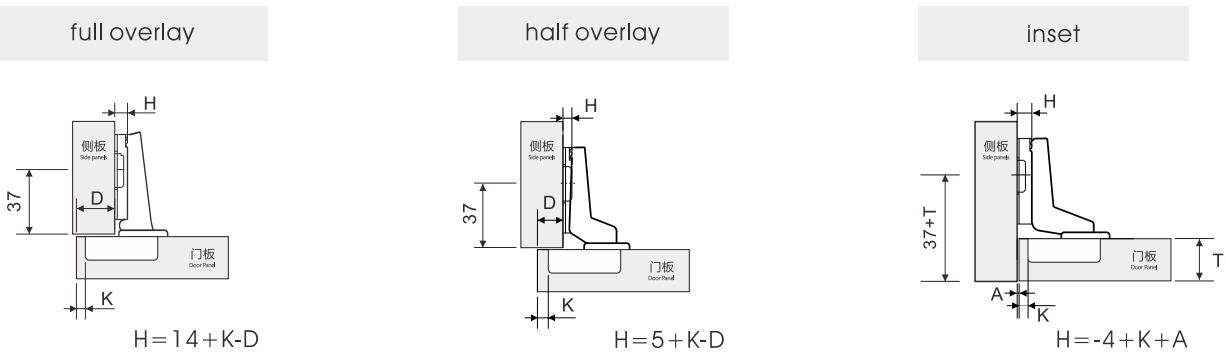

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1




■ 40杯快装厚门缓冲铰链

材料：冷轧钢
开启角度：100°
铰杯深度：13.2mm
铰杯直径：40mm
面板(K)尺寸：3-11mm
适用门板厚度：16-30mm

■ Φ40 soft closing hinge
Clip-on, one way

Material: steel
Angle of opening: 100°
Thickness of hinge cup : 13.2mm
Diameter of hinge cup : 40mm
Dimension of door (K) : 3-11mm
Range for door thickness: 16-30mm

铰杯种类 Hinge cup types



H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay




$H = 18 + K - D$

half overlay



$H = 9 + K - D$

inset

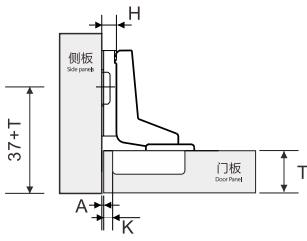


$H = -5 + K + A$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	21	22	23	24	25
2	19	20	21	22	23
4	17	18	19	20	21

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	12	13	14	15	16
2	10	11	12	13	14
4	8	9	10	11	12

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	2	1	0	-1	-2
2	4	3	2	1	0
4	6	5	4	3	2




■ 不锈钢40杯快装厚门板缓冲铰链，一段力/二段力

材料：304/201
开启角度：100°
铰杯深度：13mm
铰杯直径：40mm
面板(K)尺寸：3-12mm
适用门板厚度：20-40mm

■ Φ40mm soft closing hinge, stainless steel , clip-on, one way/two way

Material: 304/201
Angle of opening: 100°
Thickness of hinge cup : 13mm
Diameter of hinge cup : 40mm
Dimension of door (K) : 3-7mm
Range for door thickness : 20-40mm

铰杯种类 Hinge cup types



H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay




$H = 18 + K - D$

half overlay



$H = 9 + K - D$

inset




$H = -5 + K + A$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	21	22	23	24	25
2	19	20	21	22	23
4	17	18	19	20	21

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	12	13	14	15	16
2	10	11	12	13	14
4	8	9	10	11	12

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	2	1	0	-1	-2
2	4	3	2	1	0
4	6	5	4	3	2




■ 4D二段力快装缓冲铰链

材料：冷轧钢
开启角度：105°
铰杯深度：13.5mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm

■ 4D Soft closing hinge, Clip-on, two way

Material: Steel
Angle of opening: 105°
Thickness of hinge cup : 13.5mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness: 14-21mm

铰杯种类 Hinge cup types

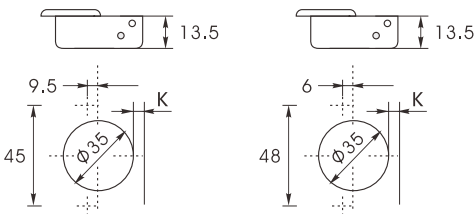

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel

T=门板厚度
T=Door panel thickness


full overlay

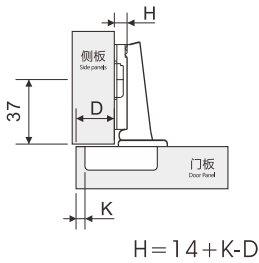

$H = 14 + K - D$

$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19


half overlay



$H = 5 + K - D$



$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10

inset



$H = -4 + K + A$

$\frac{A}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1

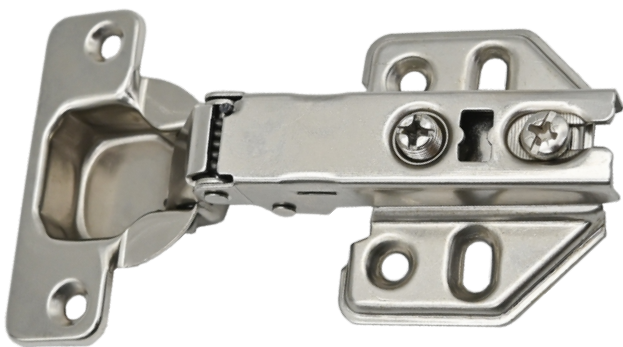


■ 浅杯滑入式缓冲铰链

材料：冷轧钢
开启角度：103°
铰杯深度：9.5mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
门可选用板厚度：14-21mm

■ Shallow cup slide-on soft closing hinge

Material : steel
Angle of opening: 103°
Depth of hinge cup : 9.5mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness: 14-21mm

铰杯种类 Hinge cup types

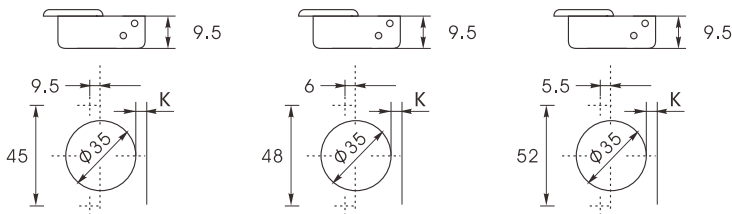

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel

T=门板厚度
T=Door panel thickness


full overlay



$H = 14 + K - D$

$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


half overlay



$H = 5 + K - D$



$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

inset




$H = -4 + K + A$

$\frac{A}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

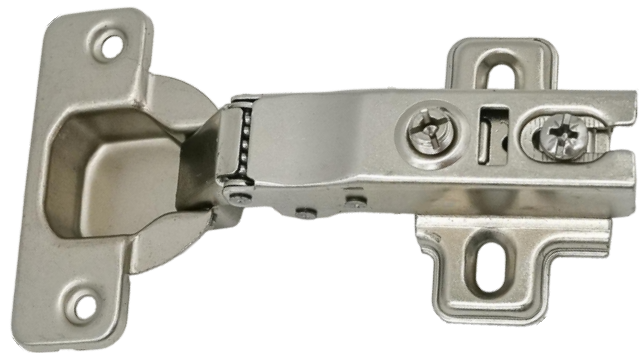

- 滑入式缓冲铰链
材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm
- Slide-on soft closing hinge
Material:steel
Angle of opening: 103°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

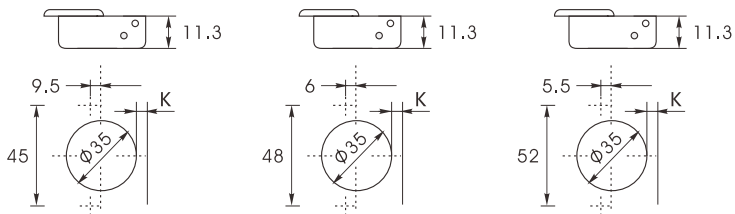


H=安装板高度
H=Height of mounting plate

D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

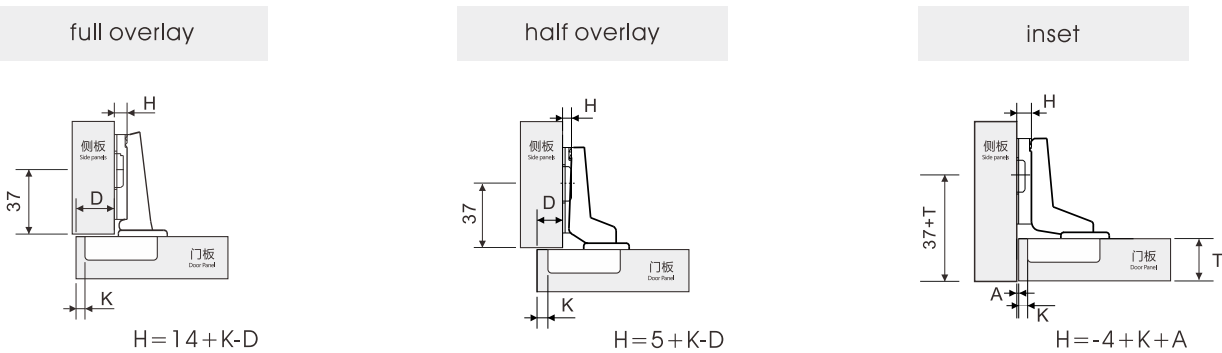

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1



- 滑入式一段力缓冲铰链
材料：冷轧钢
开启角度：110°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Slide-on soft closing hinge
One way
Material:steel
Angle of opening: 110°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

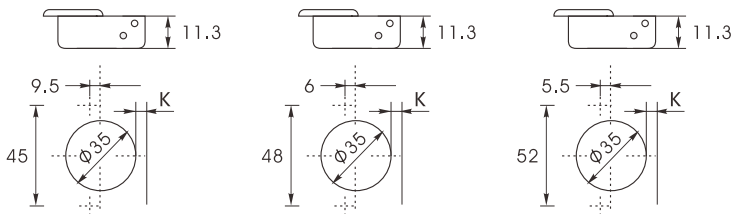


H=安装板高度
H=Height of mounting plate

D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

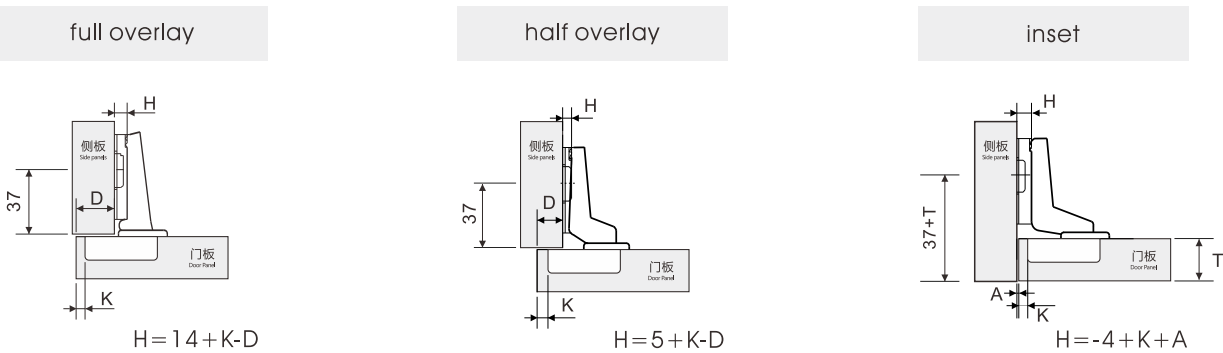

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

$\frac{A}{H} \backslash K$	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1




■小角度厚门板一字缓冲铰链


材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-25mm

■Thick door panels Soft Closing Hinge ,
small angle, Two way,Clip-on
Material:steel
Angle of opening: 103°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-25mm

铰杯种类 Hinge cup types

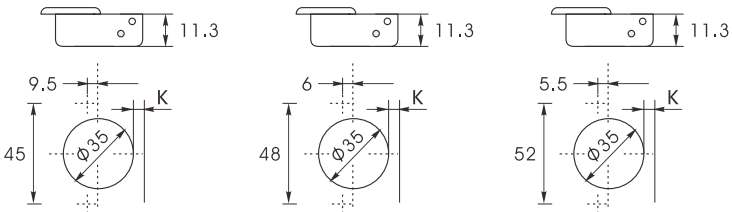


H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

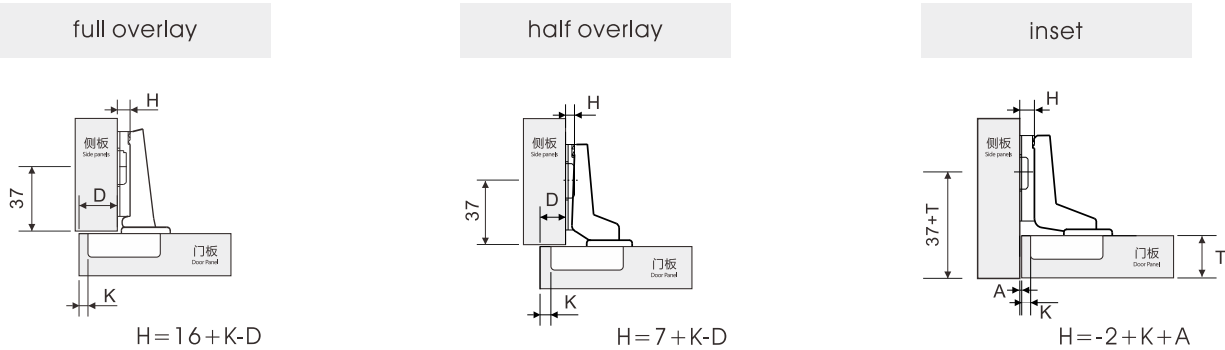

$\frac{D}{H}$	K	3	4	5	6	7
0	19	20	21	22	23	
2	17	18	19	20	21	
4	15	16	17	18	19	

$\frac{D}{H}$	K	3	4	5	6	7
0	10	11	12	13	14	
2	8	9	10	11	12	
4	6	7	8	9	10	

$\frac{A}{H}$	K	3	4	5	6	7
0	-1	-2	-3	-4	-5	
2	1	0	-1	-2	-3	
4	3	2	1	0	-1	




■铝门框小角度一字缓冲铰链


材料:冷轧钢
开启角度：103°
铝框铰杯钻孔尺寸：28mm
铝型材可选用W宽度：19-23mm

■Aluminium door frame
small angle buffer Single-base hinge
Material: Steel
Angle of opening: 103°
profile hinge head:28mm
Range of width of aluminum:19-23mm

铰杯种类 Hinge cup types




H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

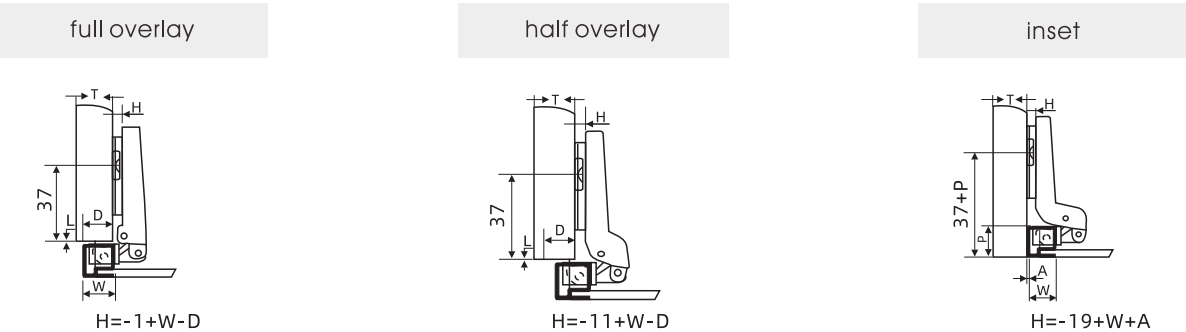

$\frac{D}{H}$	W	19	20	21	22	23
0	18	19	20	21	22	

$\frac{D}{H}$	W	19	20	21	22	23
0	8	9	10	11	12	


$\frac{A}{H}$	W	19	20	21	22	23
0	0	-1	-2	-3	-4	



■定位式二段力/3D快装 一字缓冲铰链
材料:冷轧钢/不锈钢
开启角度: 103°
铰杯深度: 11.3mm
铰杯直径: 35mm
面板(K)尺寸: 3-7mm
门可选用板厚度: 14-23mm


■ 3D linear base soft closing hinge,
Positional two way, clip on
Material: Steel / Stainless Steel
Angle of opening: 103°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness: 14-23mm

铰杯种类 Hinge cup types

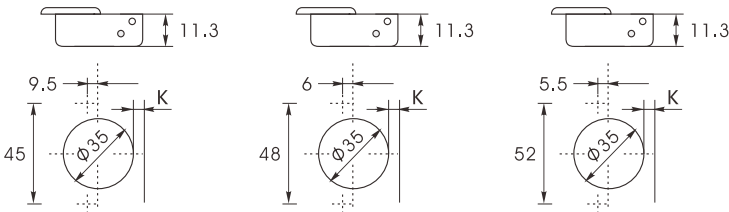


H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

full overlay



$H = 16 + K - D$


$\frac{D}{H} \backslash K$	3	4	5	6	7
0	19	20	21	22	23



■四段力/零角度一字缓冲铰链
材料: 冷轧钢
开启角度: 97°
铰杯深度: 11.5mm
铰杯直径: 35mm
面板(K)尺寸: 3-7mm
适用门板厚度: 18-25mm


■ Four Way/Zero Angle Single Basesoft
Closing Hinge,Screw-On
Material:steel
Angle of opening: 97°
Thickness of hinge cup :11.5mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 18-25mm

铰杯种类 Hinge cup types

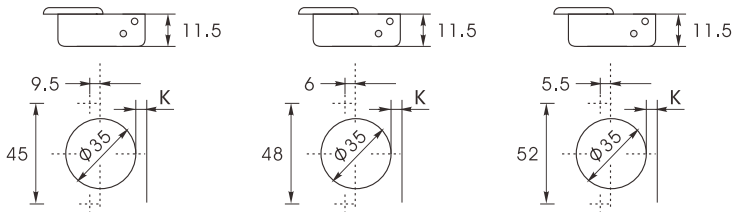

H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness



full overlay



$H = 16 + K - D$

$\frac{D}{H} \backslash K$	3	4	5	6	7
0	19	20	21	22	23
2	17	18	19	20	21
4	15	16	17	18	19

SP068

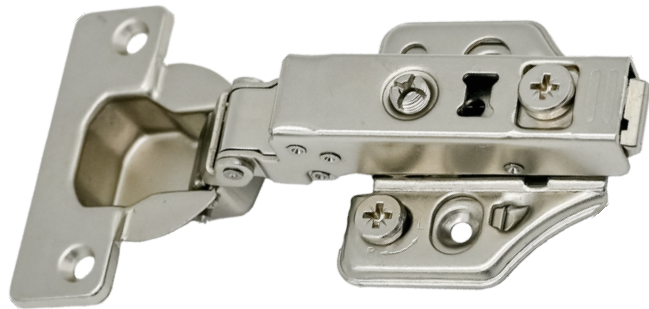


■ 26mm厚侧板二段力缓冲铰链

材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-26mm
可盖侧板厚度：26mm

■ 26mm thick side panel door soft closing hinge

Material:steel
Angle of opening: 103°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-26mm
Thickness of coverable side plate:26mm

铰杯种类 Hinge cup types

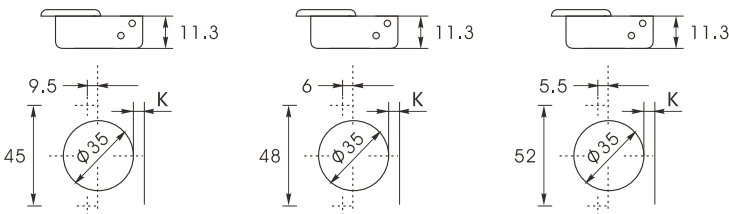

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel

T=门板厚度
T=Door panel thickness



full overlay



$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7
0	23	24	25	26	27
2	21	22	23	24	25
4	19	20	21	22	23

MINIMUM CLEARANCE 开门所需最小间隙:

SP075

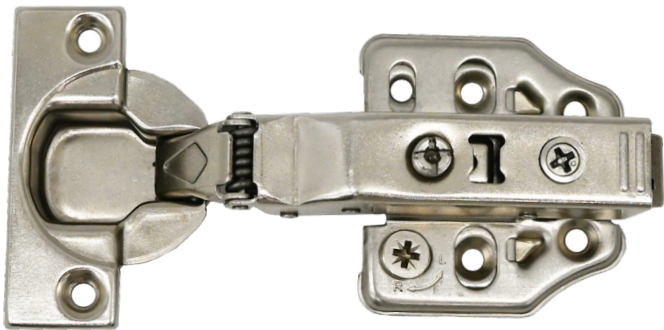


■ 零角度厚门板二段力缓冲铰链

材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-25mm

■ Thick door soft closing hinge
Zero Angle, Two Way

Material:steel
Angle of opening: 103°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-25mm

铰杯种类 Hinge cup types

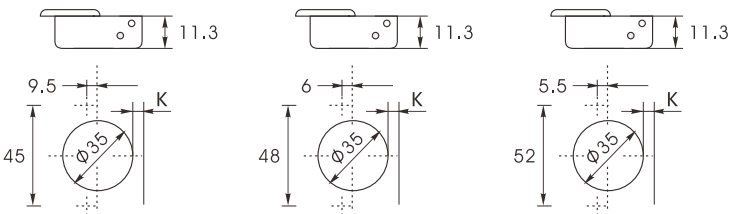

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay




$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7	8	9
0	19	20	21	22	23	24	25
2	17	18	19	20	21	22	23
4	15	16	17	18	19	20	21

half overlay





$\frac{D}{H} \backslash \frac{K}{A}$	3	4	5	6	7	8	9
0	10	11	12	13	14	15	16
2	8	9	10	11	12	13	14
4	6	7	8	9	10	11	12

inset



$\frac{A}{H} \backslash \frac{K}{A}$	3	4	5	6	7	8	9
0	-1	-2	-3	-4	-5	-6	-7
2	1	0	-1	-2	-3	-4	-5
4	3	2	1	0	-1	-2	-3

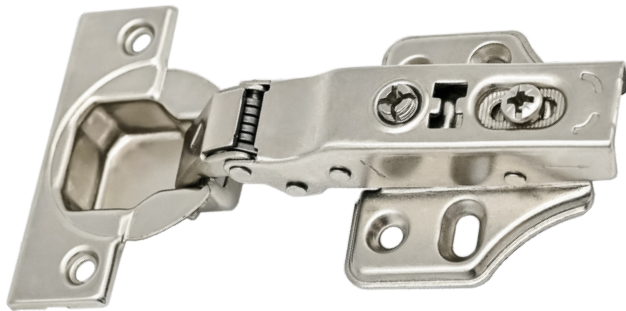


■ 零角度固装二段力缓冲铰链

材料：冷轧钢
开启角度：103°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm

■ Screw-On/Zero Angle/Two Way, Soft Closing Hinges

Material: steel
Angle of opening: 103°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types

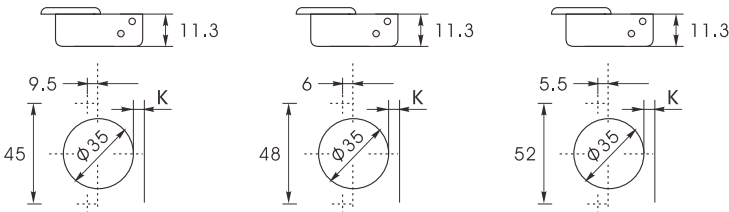


H=安装板高度
H=Height of mounting plate

D=侧板上所需盖位
D=Requird overlay on the side panel


K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

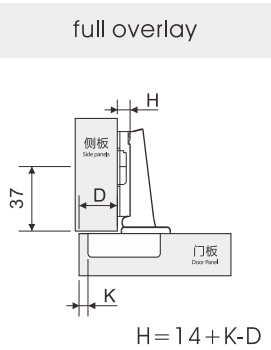



$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	17	18	19	20	21

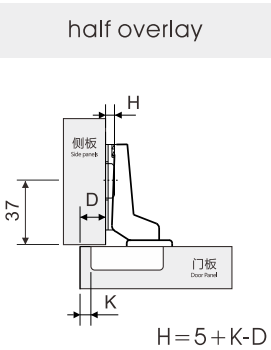

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	8	9	10	11	12

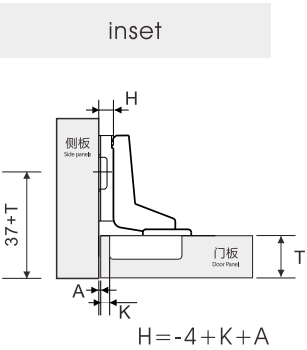

$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	1	0	-1	-2	-3

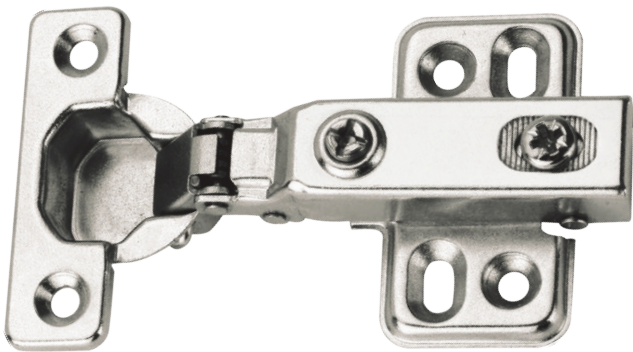


■ 26杯固装缓冲铰链

材料：冷轧钢
开启角度：95°
铰杯深度：9.5mm
铰杯直径：26mm
面板(K)尺寸：3-5mm
适用门板厚度：14-20mm

■ Φ26mm Soft Closing Hinge Screw-on

Material: steel
Angle of opening: 95°
Thickness of hinge cup : 9.5mm
Diameter of hinge cup : 26mm
Dimension of door (K) : 3-5mm
Range for door thickness : 14-20mm

铰杯种类 Hinge cup types




H=安装板高度
H=Height of mounting plate

D=侧板上所需盖位
D=Requird overlay on the side panel


K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

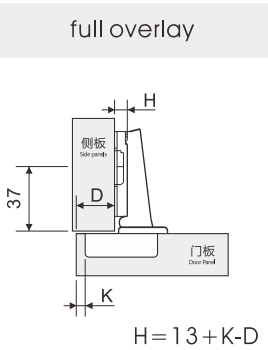



$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	16	17	18	19	20

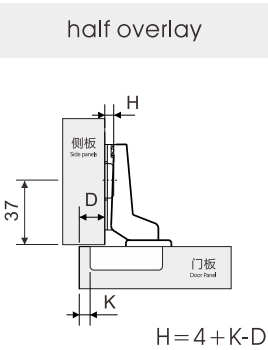

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	7	8	9	10	11

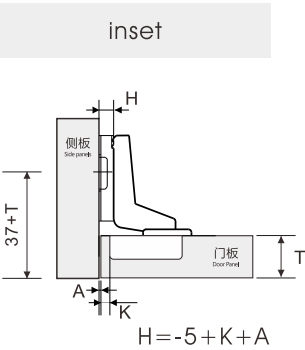


$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	2	1	0	-1	-2

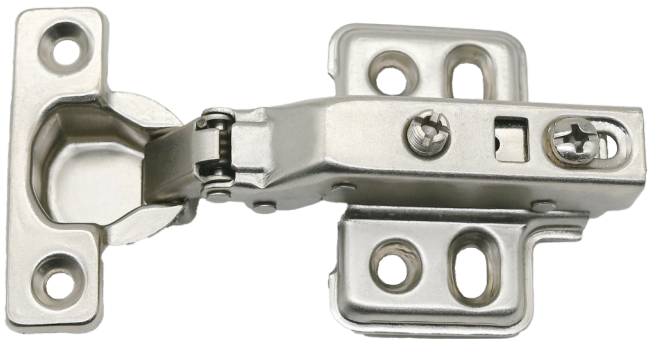

- 26杯固装缓冲铰链
材料：冷轧钢
开启角度：100°
铰杯深度：10mm
铰杯直径：26mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm
- Φ26mm Soft Closing Hinge
Screw-on
Material:steel
Opening Angle:100°
Depth Of Hinge Cup:10mm
Diameter Of Hinge Cup:26mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types



- H=安装板高度
H=Height of mounting plate
- D=侧板上所需盖位
D=Requird overlay on the side panel
- K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
- A=门板与侧板间隙
A=Gap between mounting plate and side panel
- T=门板厚度
T=Door panel thickness

full overlay

$H=12+K-D$

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	15	16	17	18	19

half overlay



$H=2+K-D$

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	5	6	7	8	9

inset


$H=-5+K+A$

$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	2	1	0	-1	-2

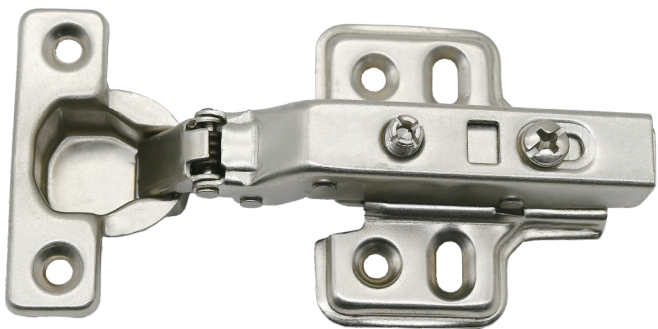

- 26杯快装缓冲铰链
材料：冷轧钢
开启角度：100°
铰杯深度：10mm
铰杯直径：26mm
面板(K)尺寸：3-7mm
适用门板厚度：14-21mm
- Φ26mm soft closing hinge
Clip-on
Material:steel
Opening Angle:100°
Depth Of Hinge Cup:10mm
Diameter Of Hinge Cup:26mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-21mm

铰杯种类 Hinge cup types



- H=安装板高度
H=Height of mounting plate
- D=侧板上所需盖位
D=Requird overlay on the side panel
- K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
- A=门板与侧板间隙
A=Gap between mounting plate and side panel
- T=门板厚度
T=Door panel thickness

full overlay

$H=12+K-D$

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	15	16	17	18	19
2	13	14	15	16	17
4	11	12	13	14	15

half overlay

$H=2+K-D$


$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	5	6	7	8	9
2	3	4	5	6	7
4	1	2	3	4	5

inset

$H=-5+K+A$

$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	2	1	0	-1	-2
2	4	3	2	1	0
4	6	5	4	3	2

SZ 125





■ 125° 骨骼门铰链
材料：冷轧钢/不锈钢
开启角度：125°
铰杯深度：11.5mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：16-36mm

■ 125° Degree Ultra Large Angle soft Closing Hinge
Material: steel/Stainless steel
Angle of opening: 125°
Thickness of hinge cup : 11.5mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 16-36mm

铰杯种类 Hinge cup types

可选底座 choose plate

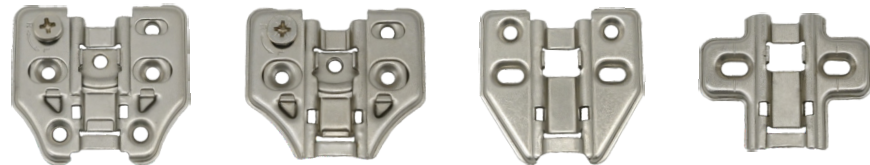


可选款式 Available styles

不锈钢/Stainless steel

枪黑/Gun Black



SZ 155





■ 155° 骨骼门铰链
材料：冷轧钢/不锈钢
开启角度：155°
铰杯深度：11.5mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：16-36mm

■ 155° Degree Ultra Large Angle soft Closing Hinge
Material: steel/Stainless steel
Angle of opening: 155°
Thickness of hinge cup : 11.5mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 16-36mm

铰杯种类 Hinge cup types

可选底座 choose plate

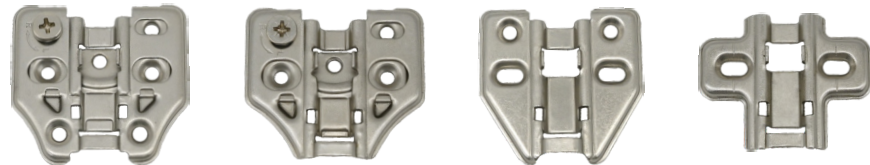


可选款式 Available styles

固装款/Screw-on


快拆款/Clip-on






- 165° 缓冲铰链
材料：冷轧钢
开启角度：165°
铰杯深度：11.9mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-26mm
- 165° Soft Closing Hinge
Material:steel
Angle of opening: 165°
Thickness of hinge cup :11.9mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-26mm

铰杯种类 Hinge cup types




- H=安装板高度
H=Height of mounting plate
- D=侧板上所需盖位
D=Requird overlay on the side panel
- K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
- A=门板与侧板间隙
A=Gap between mounting plate and side panel
- T=门板厚度
T=Door panel thickness

full overlay




$H=14+K-D$

half overlay



$H=4+K-D$

inset




$H=0+K+A$

$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17


$\frac{D}{H} \backslash \frac{K}{H}$	3	4	5	6	7
0	7	8	9	10	11
2	5	6	7	8	9
4	3	4	5	6	7

$\frac{A}{H} \backslash \frac{K}{H}$	3	4	5	6	7
2	-1	-2	-3	-4	-5
4	1	0	-1	-2	-3



- 特殊角度铰链
材料：冷轧钢
开启角度：30°/45°/90°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-7mm
适用门板厚度：14-22mm
- Special Angled Hinge
Material:steel
Angle of opening: 30°/45°/90°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-7mm
Range for door thickness : 14-22mm

铰杯种类 Hinge cup types



- H=安装板高度
H=Height of mounting plate
- D=侧板上所需盖位
D=Requird overlay on the side panel
- K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
- A=门板与侧板间隙
A=Gap between mounting plate and side panel
- T=门板厚度
T=Door panel thickness

45°




30°



90°




SY



- 165° 缓冲铰链**
材料：冷轧钢
开启角度：165°
铰杯深度：11.9mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-24mm
- 165° Soft Closing Hinge**
Material:steel
Angle of opening: 165°
Thickness of hinge cup :11.9mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-24mm

铰杯种类 Hinge cup types



H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay

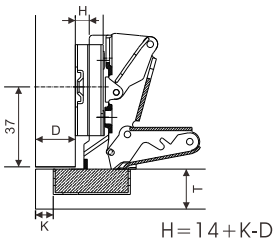


$\frac{D}{H}$	K	3	4	5	6	7
0		17	18	19	20	21
2		15	16	17	18	19
4		13	14	15	16	17

half overlay

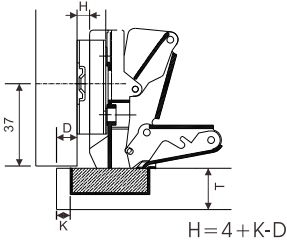


$\frac{D}{H}$	K	3	4	5	6	7
0		8	9	10	11	12
2		6	7	8	9	10
4		4	5	6	7	8

inset

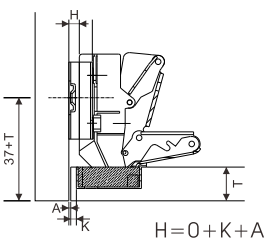


$\frac{A}{H}$	K	3	4	5	6	7
2		-1	-2	-3	-4	-5
4		1	0	-1	-2	-3

SH



- 特殊角度铰链**
材料：冷轧钢
开启角度：30°/45°/90°/135°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-24mm
- Special Angled Hinge**
Material:steel
Angle of opening: 30°/45°/90°/135°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-24mm

铰杯种类 Hinge cup types



H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup


A=门板与侧板间隙
A=Gap between mounting plate and side panel

T=门板厚度
T=Door panel thickness


30°

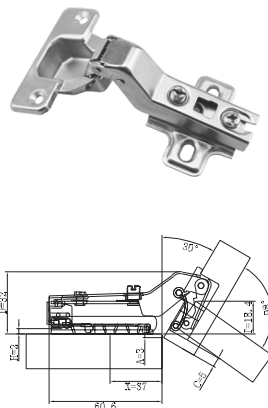


45°

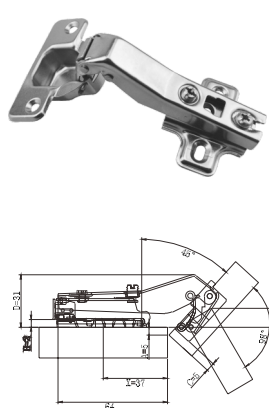

90°

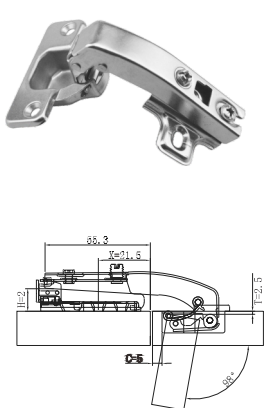

135°

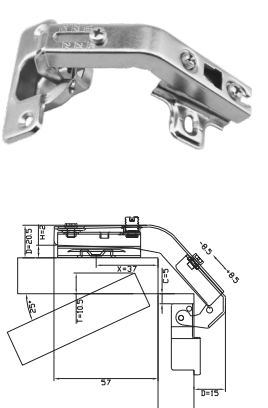


SSH004N



- 35杯短臂二段力缓冲铰链
材料：冷轧钢
开启角度：105°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Φ35mm Short Arm Soft Closing Hinge,Two Way
Material:steel
Angle of opening: 105°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

SSH004-G

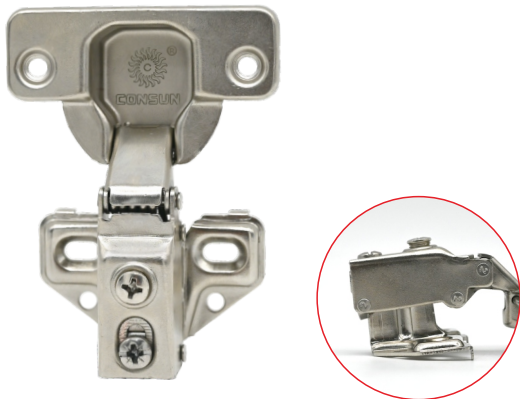


- 35杯短臂缓冲高底座铰链
材料：冷轧钢
开启角度：105°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Φ35mm Short Arm Soft Closing Hinge,high plate
Material:steel
Angle of opening: 105°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

SSH004N-S




- 35杯不锈钢短臂缓冲铰链
材料：不锈钢
开启角度：105°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Φ35mm Stainless steel Short Arm Soft Closing Hinge
Material:Stainless steel
Angle of opening: 105°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

SSH004T

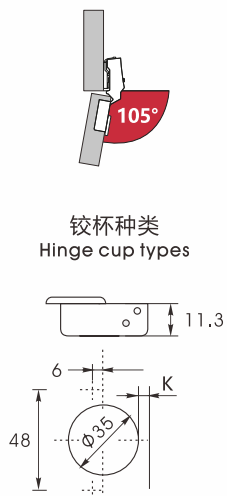

- 35杯短臂偏心可调二段力缓冲铰链
材料：冷轧钢
开启角度：105°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-21mm
- Φ35mm Short Arm 2D Soft Closing Hinge, Two Way
Material:steel
Angle of opening: 105°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-21mm

SH004-LT




- 20极筒铝框短臂二段力缓冲铰链
材料：冷轧钢
开启角度:95°
铝框铰杯钻孔尺寸：28mm
铝型材可选用W宽度：19-23mm
- Aluminum Door Hinge cup, Two Way
Material:steel
Angle of opening: 95°
profile hinge head:28mm
Range of width of aluminum:19-23mm

SSH004N-40




- 40杯短臂固装缓冲铰链
材料：冷轧钢
开启角度：95°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-22mm
- Φ40mm Short Arm Soft Closing Hinge,Screw-on
Material:steel
Angle of opening: 95°
Thickness of hinge cup :11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-22mm




- 特殊角度铰链
- 材料：冷轧钢
- 开启角度：-30°/-45°
- 铰杯深度：11.3mm
- 铰杯直径：35mm
- 面板(K)尺寸：3-6mm
- 适用门板厚度：14-24mm
- Special Angled Hinge
- Material:steel
- Angle of opening: -30°/-45°
- Thickness of hinge cup :11.3mm
- Diameter of hinge cup : 35mm
- Dimension of door (K) : 3-6mm
- Range for door thickness : 14-24mm

铰杯种类 Hinge cup types




- H=安装板高度
- H=Height of mounting plate
- D=侧板上所需盖位
- D=Requird overlay on the side panel
- K=门板外线与铰杯钻孔距离
- K=Distance between door edge and drilling holes on hinge cup
- A=门板与侧板间隙
- A=Gap between mounting plate and side panel
- T=门板厚度
- T=Door panel thickness




- 铝框快装缓冲铰链
- 材料：冷轧钢
- 开启角度：110°
- 铝框铰杯钻孔尺寸：28mm
- 铝型材可选用W宽度：19-23mm
- Aluminum frame soft closing hinge, clip on
- Material:steel
- OpeningAngle:110°
- profile hinge head:28mm
- Range of width of aluminum:19-23mm

铰杯种类 Hinge cup types



- H=安装板高度
- H=Height of mounting plate
- D=侧板上所需盖位
- D=Requird overlay on the side panel
- K=门板外线与铰杯钻孔距离
- K=Distance between door edge and drilling holes on hinge cup
- A=门板与侧板间隙
- A=Gap between mounting plate and side panel
- T=门板厚度
- T=Door panel thickness


full overlay



$H=(W+L-2)-D$

$\frac{D}{H} \backslash W$	19	20	21	22	23
2	15	16	17	18	19
4	13	14	15	16	17


half overlay



$H=(W+L-10)-D$

$\frac{D}{H} \backslash W$	19	20	21	22	23
2	7	8	9	10	11
4	5	6	7	8	9

inset



$H=(W-17)+D$

$\frac{A}{H} \backslash W$	19	20	21	22	23
2	0	-1	-2	-3	-4
4	2	1	0	-1	-2

ADHT01



- 25KG天地铰链**
全隐藏式铰链，适用于厚度20-32mm
木门及铝框门金属杯深16.2mm,2只铰链最大承重: 25KG
门最大使用尺寸:高度2800mm,宽度500mm
最大开启角度105°集成静音缓冲关闭系统
门板钻孔距离(K)值: 3-6mm(木门),铝框门固定K值:4mm
最大盖位:D=21.5mm(木门),铝框门D=19.5mm
门缝调节: +2.5/-0mm
上下调节: +1.0/-1.0mm
盖位调节: +2.0/-2.0mm
材质:锌合金+高强度锰钢
表面处理: 镀黑镍
- 25 KG Hydraulic Air Hinge**
Concealed hinge for for aluminum and wooden door
For door thickness of 20-32mm,Cup depth 16.2mm
2 hinges Max. loading capacity 25kg
Opening 105°, integrated Silent close System
Drilling size(k): 3-6mm(wooden door), Aluminum door fixed K size:4mm.
Max. overlay: D=21.5mm(wooden door), Aluminum door D=19.5mm
Depth adjustment: +2.5/0mm
height adjustment: +1.0/1.0mm
Overlay adjustment : +2.0/2.0mm
Material: Zinc alloy+ high strength manges steel
Finish: Black nickel

ADHT02



- 30KG天地铰链**
全隐藏式铰链，适用于厚度20-32mm
木门及铝框门金属杯深16.2mm,2只铰链最大承重: 30KG
门最大使用尺寸:高度2800mm,宽度500mm
最大开启角度105°集成静音缓冲关闭系统
门板钻孔距离(K)值: 3-6mm(木门),铝框门固定K值:4mm
最大盖位:D=21.5mm(木门),铝框门D=19.5mm
门缝调节: +2.5/-0mm
上下调节: +1.0/-1.0mm
盖位调节: +2.0/-2.0mm
材质:锌合金+高强度锰钢
表面处理: 镀黑镍
- 30 KG Hydraulic Air Hinge**
Concealed hinge for for aluminum and wooden door
For door thickness of 20-32mm,Cup depth 16.2mm
2 hinges Max. loading capacity 30kg
Opening 105°, integrated Silent close System
Drilling size(k): 3-6mm(wooden door), Aluminum door fixed K size:4mm.
Max. overlay: D=21.5mm(wooden door), Aluminum door D=19.5mm
Depth adjustment: +2.5/0mm
height adjustment: +1.0/1.0mm
Overlay adjustment : +2.0/2.0mm
Material: Zinc alloy+ high strength manges steel
Finish: Black nickel

ADHT03




- 35KG天地铰链**
全隐藏式铰链，适用于厚度22-35mm木门及铝框门金属杯深18mm,
2只铰链最大承重35 KG门最大使用尺寸:高度2800mm,
宽度600mm最大开启角度105°集成静音缓冲关闭系统
门板钻孔距离(K)值:4-8mm(木门),
铝框门固定K值:4mm,最大盖位:D=30.0mm(木门),
铝框门D=26.0mm门缝调节: +3.5/-0.5mm
上下调节: +1.5/-1.5mm
盖位调节: +2.0/-2.0mm
材质:锌合金+高强度锰钢
表面处理:镀黑镍
- 35 KG Hydraulic Air Hinge**
Concealed hinge for for aluminum and wooden door
For door thickness of 22-35mm,Cup depth 18mm
2 hinges Max. loading capacity 35kg
Max. door size: Height 2800mm, width 600mm
Opening 105°, integrated Silent close System
Drilling size(K): 4-8mm(wooden door), Aluminum door fixed K size:4mm.
Max. overlay: D=30.0mm(wooden door), Aluminum door D=26.0mm
Depth adiustment: +3.5/0.5mm
Height adiustment: +1.5-1.5mm
Overlay adjustment : +2.0/2.0mm
Material: Zinc alloy+ high strength manges steel
Finish: Black nickel

ADHZ01



- 短针式 针式铰链**
适用于35mm厚铝框玻璃门
2只铰链最大承重:30KG(含铝框及玻璃)
门板最大尺寸:高度2700mm,宽度500mm
最大开启角度270°集成磁吸阻尼静音缓冲关闭系统
底座高度11.0mm,柜体侧板最小厚度18mm
最大盖位:全盖D=16mm,半盖D=11mm
门缝调节: +2, 上下调节: +2-2, 盖位调节: ±2
主材质: 锌合金
表面处理:喷涂
颜色: 香槟金,黑色,浅灰,原色
*原色即材料色,可提供给门厂与型材一同进行表面处理以使颜色一致
- Short Pin Type Pin Hinge**
Clip- on pivot hinge for aluminum frame door, frame thickness 35mm
2 hinges Max. loading capacity 30kg
Max. door size: Height 2700mm, width 500mm
Opening 270°, integrated silent close system
Mounting plate Height 11.0mm, Min. thickness of side panel 18mm
Max. overlay: D=16mm(Full overlay), D=11mm (Half overlay)
Depth adjustment: +2-2
height adjustment: +2-2
Overlay adjustment : +2
Material: Zinc alloy
Finish-Painting: Champagne gold, Black, Light gray, Original*
* Original color is the zinc-alloy material color, hinges can be paint with aluminum frame together by door's manufacturer to make the color match

ADHZ02

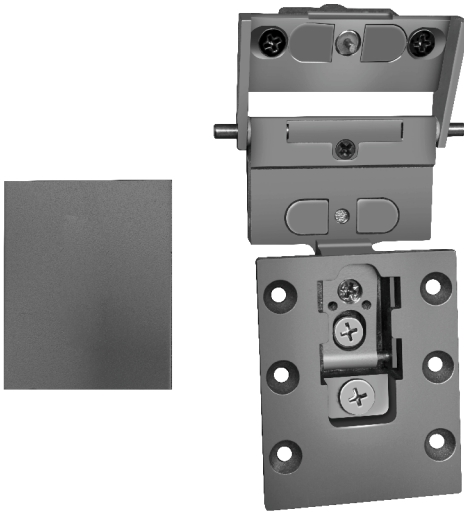


- 短针式 针式铰链**
适用于35mm厚铝框玻璃门
2只铰链最大承重:30KG(含铝框及玻璃)
门板最大尺寸:高度2700mm,宽度500mm
最大开启角度270°集成磁吸阻尼静音缓冲关闭系统
底座高度11.0mm,柜体侧板最小厚度18mm
最大盖位:全盖D=16mm,半盖D=11mm
门缝调节: +2, 上下调节: +2-2, 盖位调节: ±2
主材质: 锌合金
表面处理:喷涂
颜色: 香槟金,黑色,浅灰,原色
*原色即材料色,可提供给门厂与型材一同进行表面处理以使颜色一致
- Short Pin Type Pin Hinge**
Clip- on pivot hinge for aluminum frame door, frame thickness 35mm
2 hinges Max. loading capacity 30kg
Max. door size: Height 2700mm, width 500mm
Opening 270°, integrated silent close system
Mounting plate Height 11.0mm, Min. thickness of side panel 18mm
Max. overlay: D=16mm(Full overlay), D=11mm (Half overlay)
Depth adjustment: +2-2
height adjustment: +2-2
Overlay adjustment : +2
Material: Zinc alloy
Finish-Painting: Champagne gold, Black, Light gray, Original*
* Original color is the zinc-alloy material color, hinges can be paint with aluminum frame together by door's manufacturer to make the color match

ADHZ03



- 短针式 针式铰链**
适用于35mm厚铝框玻璃门
2只铰链最大承重:30KG(含铝框及玻璃)
门板最大尺寸:高度2700mm,宽度500mm
最大开启角度270°集成磁吸阻尼静音缓冲关闭系统
底座高度11mm,柜体侧板最小厚度18mm
最大盖位:全盖D=17mm,半盖D=11mm
门缝调节: +3.0/-0mm,上下调节: +2.0/-2.0mm(公差±0.2)
盖位调节: -2.0mm,主材质: 锌合金
表面处理:喷涂
颜色: 香槟金,黑色,浅灰,原色
- Short Pin Type Pin Hinge**
Clip- on pivot hinge for aluminum frame door, frame thickness 35mm
2 hinges Max. loading capacity 30kg
Max. door size: Height 2700mm, width 500mm
Opening 270°, integrated silent close system
Mounting plate Height 11mm, Min. thickness of side panel 18mm
Max. overlay: D=17mm(Ful overlay), D=11mm (Half overlay)
Depth adjustment: +3.0/0mm
height adjustment: +2.0/2.0mm (Tolerance+0.2)
Overlay adjustment : -2.0mm
Material: Zinc alloy
Finish-Painting: Champagne gold, Black, Light gray, Original*




26杯一段力铰链

材料: 冷轧钢
开启角度: 95°
铰杯深度: 9.5mm
铰杯直径: 26mm
面板(K)尺寸: 3-5mm
适用门板厚度: 14-20mm

26 Mini Hinge, one way

Material: steel
Angle of opening: 95°
Thickness of hinge cup : 9.5mm
Diameter of hinge cup : 26mm
Dimension of door (K) : 3-5mm
Range for door thickness : 14-20mm

铰杯种类 Hinge cup types

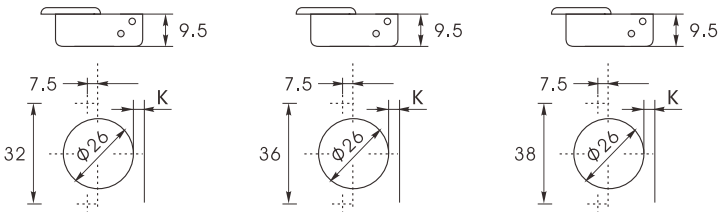

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay



$H = 12 + K - D$



half overlay



$H = 2 + K - D$

$\frac{D}{H} \backslash \frac{K}{T}$	3	4	5		
0	15	16	17		
2	13	14	15		
4	11	12	13		
6	9	10	11		

$\frac{D}{H} \backslash \frac{K}{T}$	3	4	5		
0	5	6	7		
2	3	4	5		
4	1	2	3		

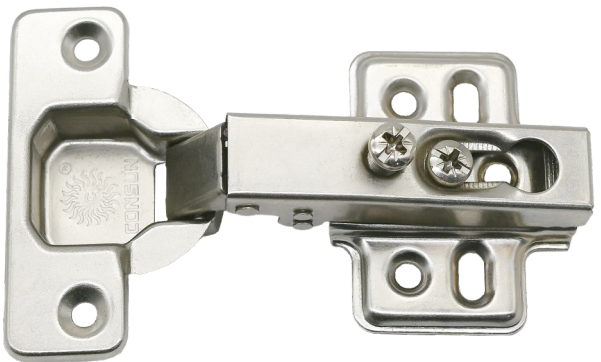


一段力铰链

材料:冷轧钢
开启角度: 100°
铰杯深度: 11.3mm
铰杯直径: 35mm
铰杯孔开线尺寸(K): 3-6mm
适用门板厚度: 14-24mm

Hinge, one way

Material: steel
Angle of opening: 100°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-24mm

铰杯种类 Hinge cup types

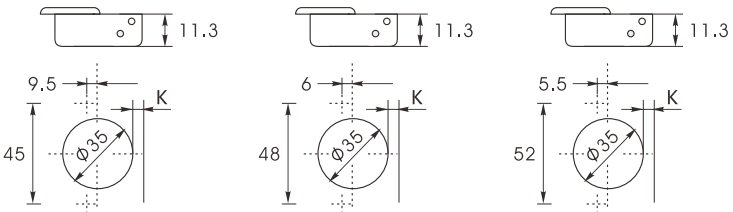

H=安装板高度
H=Height of mounting plate


D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

full overlay




$H = 15 + K - D$

half overlay



$H = 5 + K - D$

inset





$H = -3 + K + A$

$\frac{D}{H} \backslash \frac{K}{T}$	3	4	5	6	
0	18	19	20	21	
2	16	17	18	19	
4	14	15	16	17	

$\frac{D}{H} \backslash \frac{K}{T}$	3	4	5	6	
0	8	9	10	11	
2	6	7	8	9	
4	4	5	6	7	


$\frac{A}{H} \backslash \frac{K}{T}$	3	4	5	6	
0	0	-1	-2	-3	
2	2	1	0	-1	
4	4	3	2	1	

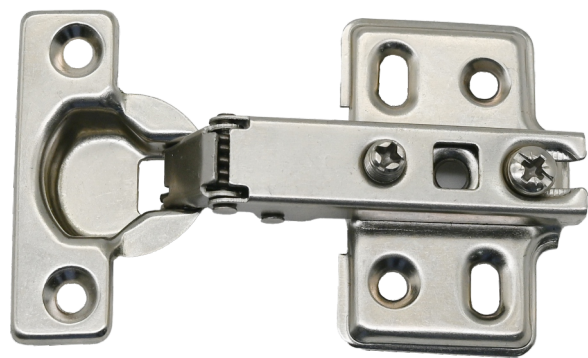

■26杯一段力铰链
材料：冷轧钢
开启角度：95°
铰杯深度：9.5mm
铰杯直径：26mm
面板(K)尺寸：3-5mm
适用门板厚度：12-18mm

■ 26 Mini Hinge,one way
Material:steel
Angle of opening: 95°
Thickness of hinge cup :9.5mm
Diameter of hinge cup : 26mm
Dimension of door (K) : 3-5mm
Range for door thickness : 12-18mm

铰杯种类 Hinge cup types

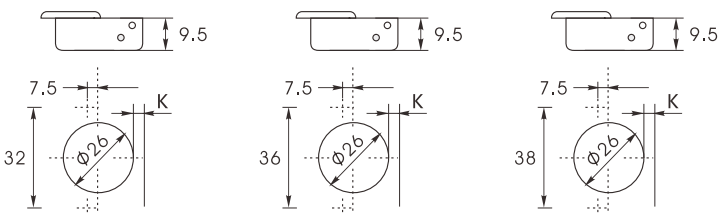


H=安装板高度
H=Height of mounting plate

D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel



T=门板厚度
T=Door panel thickness

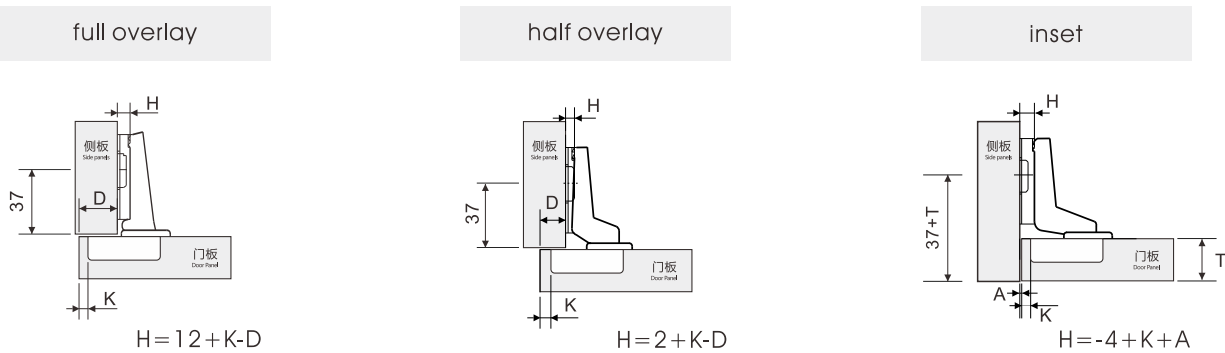

$\frac{D}{H} \backslash K$	3	4	5		
0	15	16	17		
2	13	14	15		
4	11	12	13		

$\frac{D}{H} \backslash K$	3	4	5		
0	5	6	7		
2	3	4	5		
4	1	2	3		


$\frac{A}{H} \backslash K$	3	4	5		
0	1	0	-1		
2	3	2	1		
4	5	4	3		

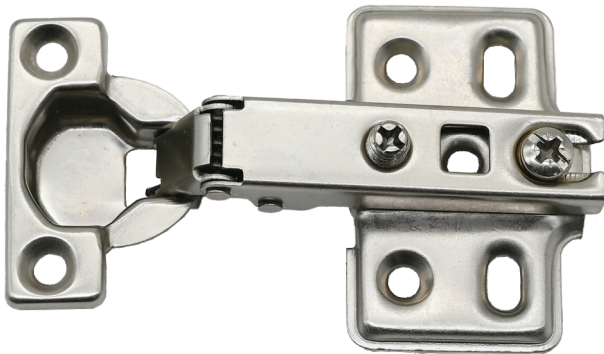

■26杯一段力铰链
材料：冷轧钢
开启角度：95°
铰杯深度：8.5mm
铰杯直径：26mm
面板(K)尺寸：3-5mm
适用门板厚度：12-18mm

■ 26 Mini Hinge,one way
Material:steel
Angle of opening: 95°
Thickness of hinge cup :8.5mm
Diameter of hinge cup : 26mm
Dimension of door (K) : 3-5mm
Range for door thickness : 12-18mm

铰杯种类 Hinge cup types

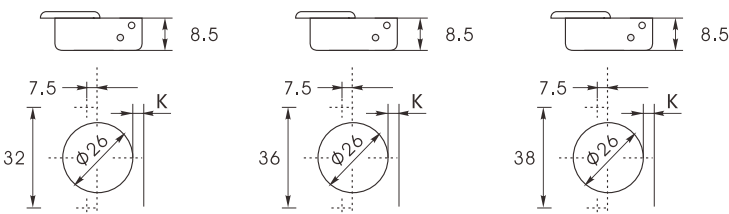


H=安装板高度
H=Height of mounting plate

D=侧板上所需盖位
D=Requird overlay on the side panel

K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup

A=门板与侧板间隙
A=Gap between mounting plate and side panel


T=门板厚度
T=Door panel thickness

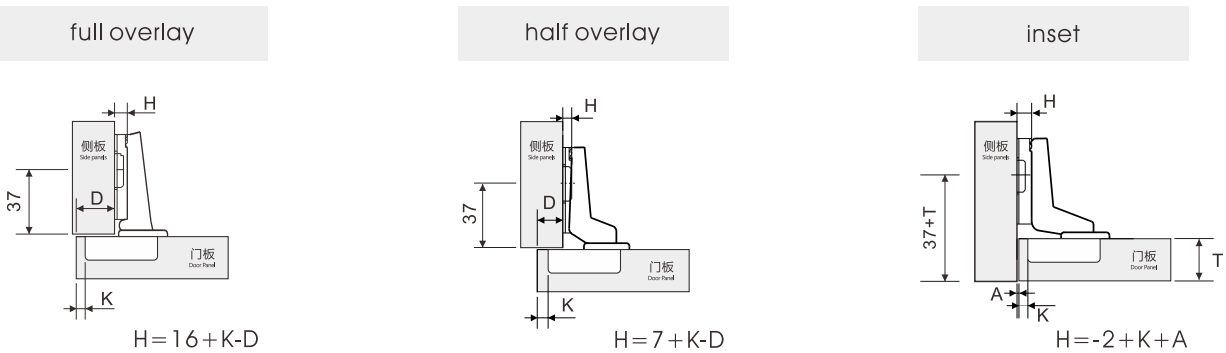

$\frac{D}{H} \backslash K$	3	4	5		
0	15	16	17		
2	13	14	15		
4	11	12	13		


$\frac{D}{H} \backslash K$	3	4	5		
0	5	6	7		
2	3	4	5		
4	1	2	3		

$\frac{A}{H} \backslash K$	3	4	5		
0	1	0	-1		
2	3	2	1		
4	5	4	3		




- 一段力铰链
材料：冷轧钢
开启角度：100°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-24mm
- Hinge, one way
Material: steel
Angle of opening: 100°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-24mm

铰杯种类 Hinge cup types

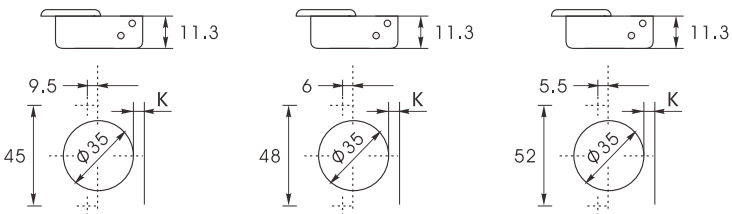


H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

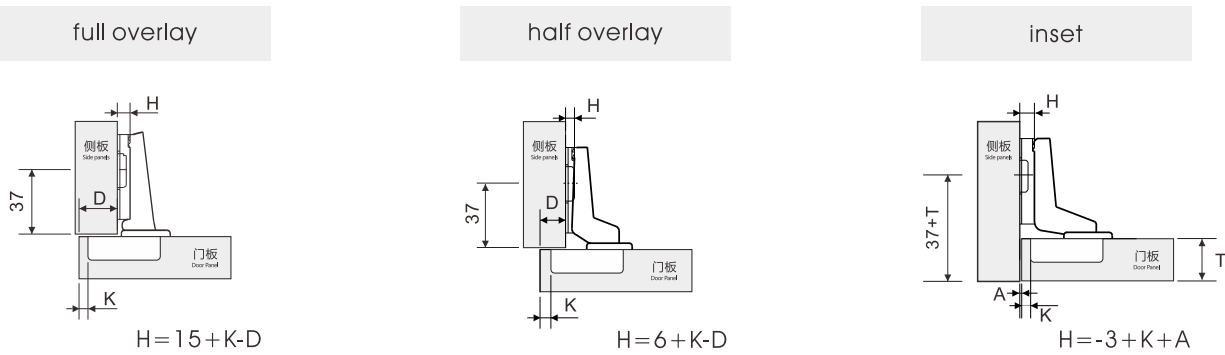

$\frac{D}{H} \backslash K$	3	4	5	6	
0	18	19	20	21	
2	16	17	18	19	
4	14	15	16	17	


$\frac{D}{H} \backslash K$	3	4	5	6	
0	9	10	11	12	
2	7	8	9	10	
4	5	6	7	8	

$\frac{A}{H} \backslash K$	3	4	5	6	
0	0	-1	-2	-3	
2	2	1	0	-1	
4	4	3	2	1	




- 二段力铰链
材料：冷轧钢
开启角度：110°
铰杯深度：11.3mm
铰杯直径：35mm
面板(K)尺寸：3-6mm
适用门板厚度：14-26mm
- Hinge, two way
Material: steel
Angle of opening: 110°
Thickness of hinge cup : 11.3mm
Diameter of hinge cup : 35mm
Dimension of door (K) : 3-6mm
Range for door thickness : 14-26mm

铰杯种类 Hinge cup types

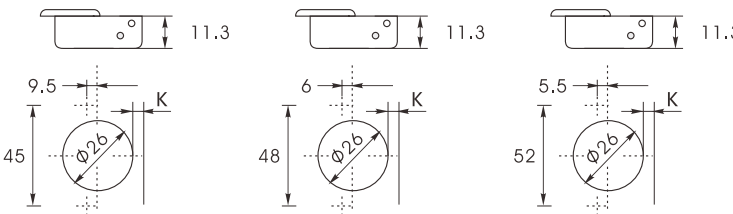

H=安装板高度
H=Height of mounting plate
D=侧板上所需盖位
D=Requird overlay on the side panel
K=门板外线与铰杯钻孔距离
K=Distance between door edge and drilling holes on hinge cup
A=门板与侧板间隙
A=Gap between mounting plate and side panel
T=门板厚度
T=Door panel thickness

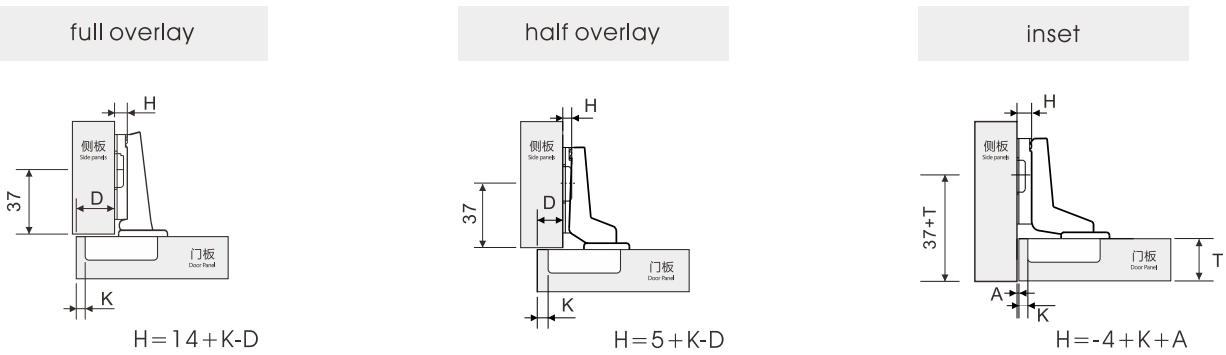

$\frac{D}{H} \backslash K$	3	4	5	6	
0	17	18	19	20	
2	15	16	17	18	
4	13	17	15	16	

$\frac{D}{H} \backslash K$	3	4	5	6	
0	8	9	10	11	
2	6	7	8	9	
4	4	5	6	7	

$\frac{A}{H} \backslash K$	3	4	5	6	
0	1	0	-1	-2	
2	3	2	1	0	
4	5	4	3	2	




■ 45mm三节防倾倒联动钢珠滑轨

材料:冷轧钢 1.2/1.2/1.5
规格:300mm-600mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ Toppling Preventing Drawer Slide

Material: Cold rolled steel 1.2/1.2/1.5
Specifications: 300mm-600mm
Load weight: 45kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

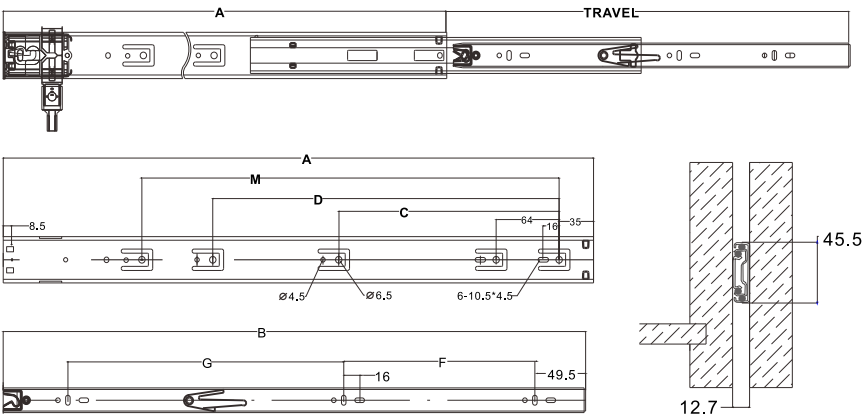

POS.	A	TRAVEL	B	C	D	M	F	G	A	
1	300	300	294.5	160			96	96	12"	
2	350	350	344.5	192			96	160	14"	
3	400	400	394.5	224			128	160	16"	
4	450	450	445.3	224	288		160	192	18"	
5	500	500	495.3	224	352		160	224	20"	
6	550	550	545.3	224	352	416	192	256	22"	
7	600	600	595.3	224	352	416	192	288	24"	




■ 45mm三节滑轨(圆边)

材料:冷轧钢 1.2/1.2/1.5
规格:250mm-900mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 45mm Full-extension Drawer Slide

Material: Cold rolled steel 1.2/1.2/1.5
Specifications: 250mm-900mm
Load weight: 45kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

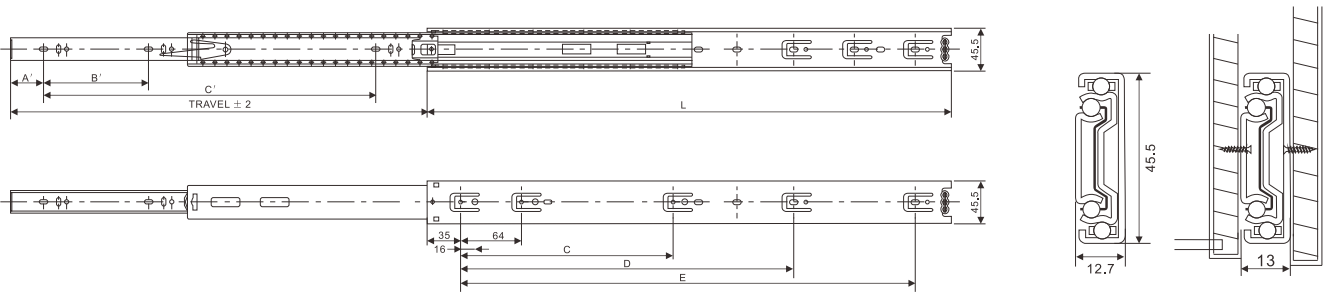

POS.	A	TRAVEL±2	L	C	D	E	A'	B'	C'
1	10"	250	250	160			35	160	
2	12"	300	300	192			35	64	224
3	14"	350	350	224			35	96	256
4	16"	400	400	224	288		35	128	320
5	18"	450	450	224	352		35	128	352
6	20"	500	500	224	352	416	35	160	416
7	22"	550	550	224	352	416	35	192	448
8	24"	600	600	224	352	480	35	192	512
9	26"	650	650	224	352	544	35	224	544
10	28"	700	700	224	352	544	35	288	608




45mm三节滑轨(直边)

材料:冷轧钢 1.2/1.2/1.5
规格:250mm-900mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

45mm Full-extension Drawer Slide

Material: Cold rolled steel 1.2/1.2/1.5
Specifications: 250mm-900mm
Load weight: 45kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

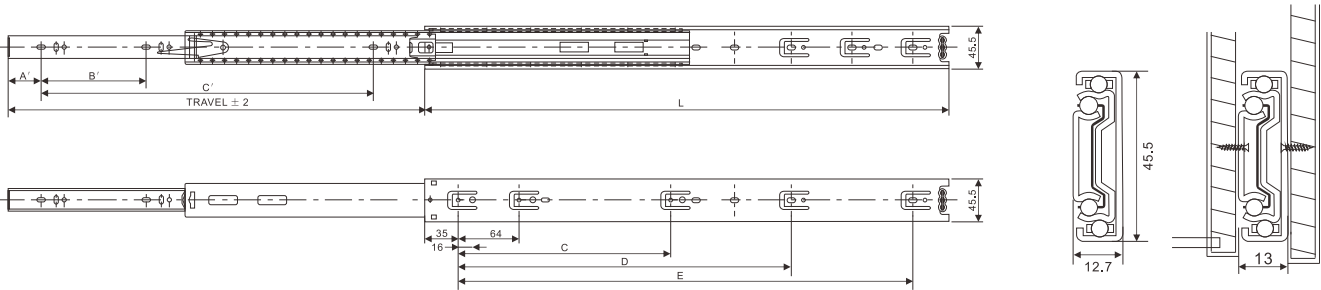

POS.	A	TRAVEL±2	L	C	D	E	A´	B´	C´
1	10"	250	250	160			35	160	
2	12"	300	300	192			35	64	224
3	14"	350	350	224			35	96	256
4	16"	400	400	224	288		35	128	320
5	18"	450	450	224	352		35	128	352
6	20"	500	500	224	352	416	35	160	416
7	22"	550	550	224	352	416	35	192	448
8	24"	600	600	224	352	480	35	192	512
9	26"	650	650	224	352	544	35	224	544
10	28"	700	700	224	352	544	35	288	608




45mm三节滑轨(直边薄料)

材料:冷轧钢 1.0/1.0/1.2
规格:250mm-600mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

45mm Full-extension Drawer Slide

Material: Cold rolled steel 1.0/1.0/1.2
Specifications: 250mm-600mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

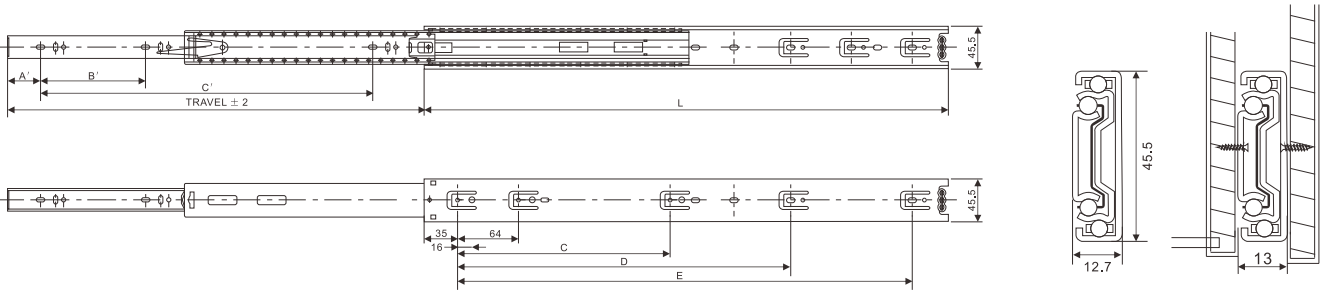

POS.	A	TRAVEL±2	L	C	D	E	A´	B´	C´
1	10"	250	250	160			35	160	
2	12"	300	300	192			35	64	224
3	14"	350	350	224			35	96	256
4	16"	400	400	224	288		35	128	320
5	18"	450	450	224	352		35	128	352
6	20"	500	500	224	352	416	35	160	416
7	22"	550	550	224	352	416	35	192	448
8	24"	600	600	224	352	480	35	192	512
9	26"	650	650	224	352	544	35	224	544
10	28"	700	700	224	352	544	35	288	608




■45mm三节滑轨(直边薄料)

材料:冷轧钢 0.9/0.9/1.1
规格:250mm-600mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■45mm Full-extension Drawer Slide

Material: Cold rolled steel 0.9/0.9/1.1
Specifications: 250mm-600mm
Load weight: 45kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

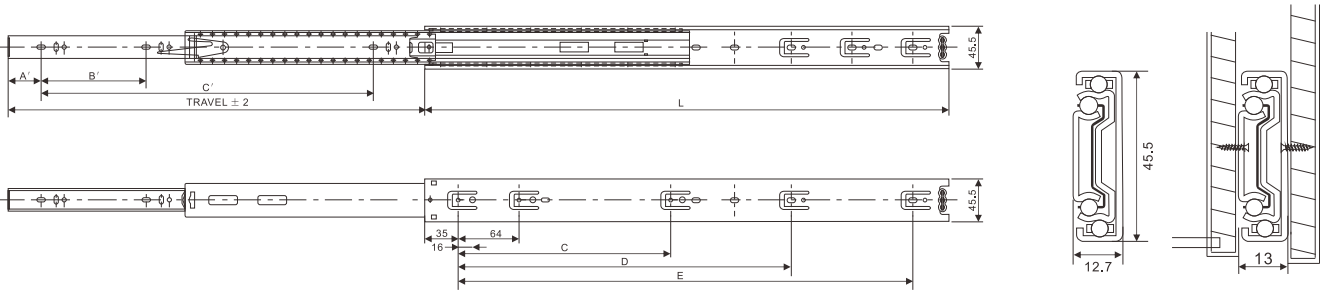

POS.	A	TRAVEL±2	L	C	D	E	A'	B'	C'
1	10"	250	250	160			35	160	
2	12"	300	300	192			35	64	224
3	14"	350	350	224			35	96	256
4	16"	400	400	224	288		35	128	320
5	18"	450	450	224	352		35	128	352
6	20"	500	500	224	352	416	35	160	416
7	22"	550	550	224	352	416	35	192	448
8	24"	600	600	224	352	480	35	192	512
9	26"	650	650	224	352	544	35	224	544
10	28"	700	700	224	352	544	35	288	608




■45mm三节缓冲滑轨(直边)

材料:冷轧钢 1.2/1.2/1.5
规格:250mm-900mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■Seamless Soft Closing double spring slide

Material: Cold rolled steel 1.2/1.2/1.5
Specifications: 250mm-900mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

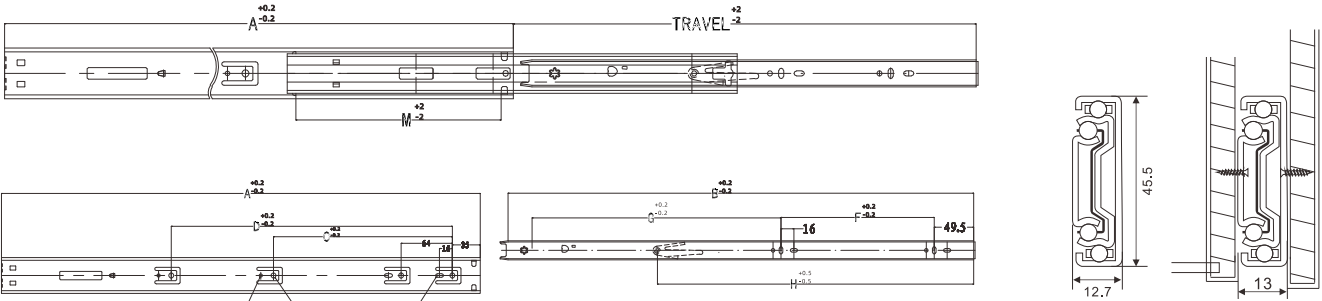


POS.	A	TRAVEL	B	C	D	F	G	A'
1	250	160	245.3			160		10"
2	300	260	295.3			64	128	12"
3	350	350	345.3			96	160	14"
4	400	400	395.3	192		128	160	16"
5	450	450	445.3	224		160	192	18"
6	500	500	495.3	224	288	160	224	20"
7	550	550	545.3	224	288	192	256	22"
8	600	600	595.3	224	352	192	288	24"



■45mm三节缓冲滑轨
材料:冷轧钢 1.0/1.0/1.2
规格:350mm-600mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■45mm Soft closing ball bearing slide
Material: Cold rolled steel 1.0/1.0/1.2
Specifications: 350mm-600mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

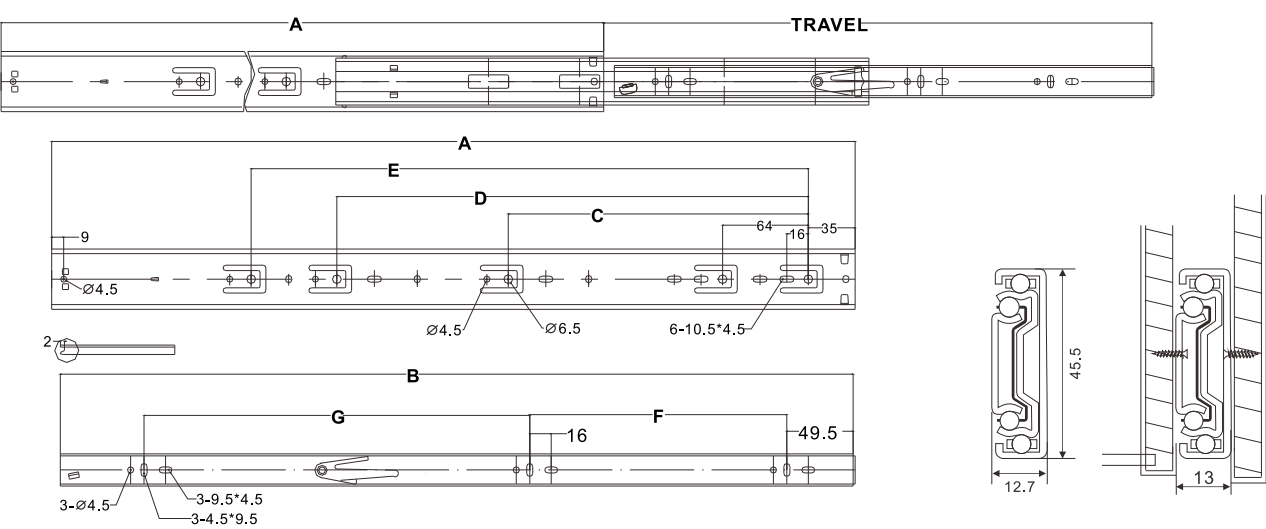


POS.	A	B	C	D	E	F	G	TRAVEL	A
1	350	344	192			96	160	350	14"
2	400	394	224			128	160	400	16"
3	450	444	224	288		128	224	450	18"
4	500	494	224	352		160	224	500	20"
5	550	544	224	352		192	256	550	22"
6	600	594	224	352	416	192	288	600	24"



■45mm三节反弹式钢珠滑轨
材料:冷轧钢 1.0/1.0/1.2
规格:250mm-900mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■45mm Push-open Ball Bearing Slide
Material: Cold rolled steel 1.0/1.0/1.2
Specifications: 250mm-900mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

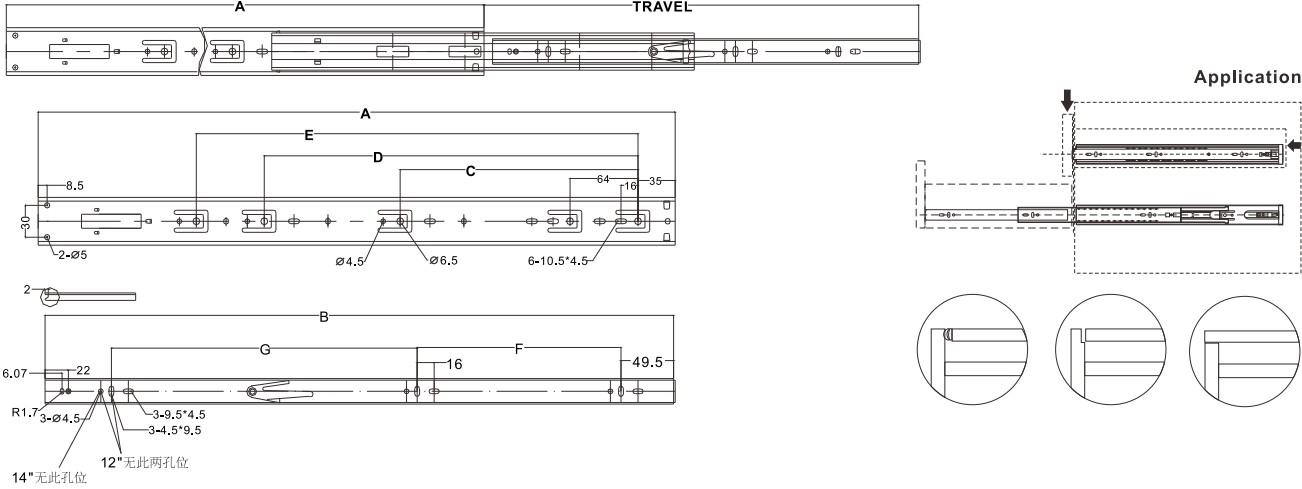

POS.	A	B	C	D	E	F	G	TRAVEL	A
1	300	290				96	128	295	12"
2	350	340	160			96	160	350	14"
3	400	390	192			128	160	400	16"
4	450	440	224			128	192	450	18"
5	500	490	224	288		160	224	500	20"
6	550	540	224	352		192	256	550	22"
7	600	590	224	352	416	192	288	600	24"




■45mm三节不锈钢缓冲滑轨

材料:不锈钢201/304
规格:250mm-600mm
负载重量:35kg/450mm
安装间隙:12.7mm+0.2mm

■45mm Stainless steel soft closing slide

Material: Stainless steel 201/304
Specifications: 250mm-600mm
Load weight: 35kg/450mm
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

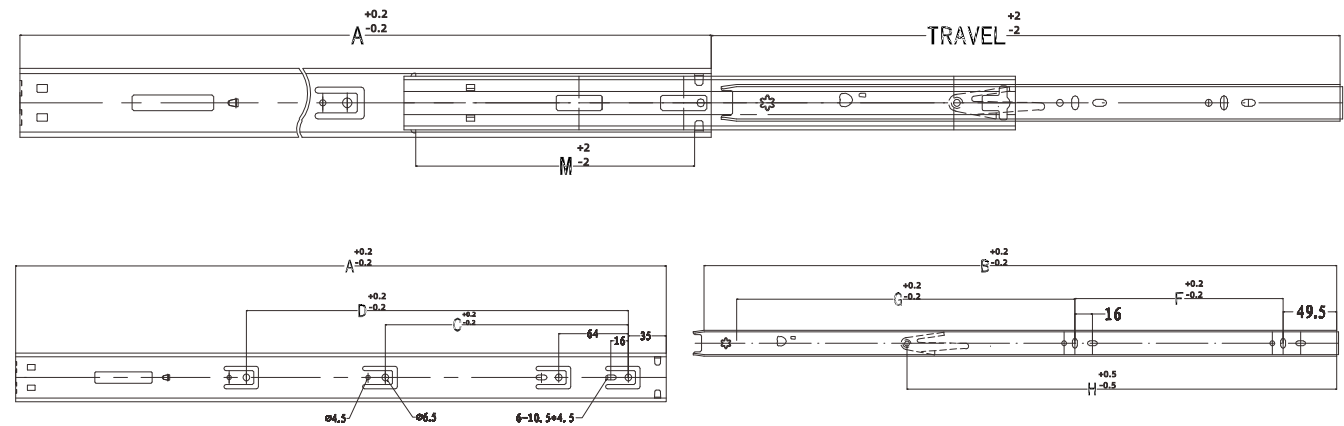

POS.	A	TRAVEL	B	C	D	F	G	A
1	250	160	245.3			160		10"
2	300	260	295.3			64	128	12"
3	350	350	345.3			96	160	14"
4	400	400	395.3	192		128	160	16"
5	450	450	445.3	224		160	192	18"
6	500	500	495.3	224	288	160	224	20"
7	550	550	545.3	224	288	192	256	22"
8	600	600	595.3	224	352	192	288	24"




■45mm三节不锈钢滑轨

材料:不锈钢201/304
规格:350mm-600mm
负载重量:35kg/450mm
安装间隙:12.7mm+0.2mm

■45mm Stainless steelfull extension ball bearing slide

Material: Stainless steel 201/304
Specifications: 250mm-600mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

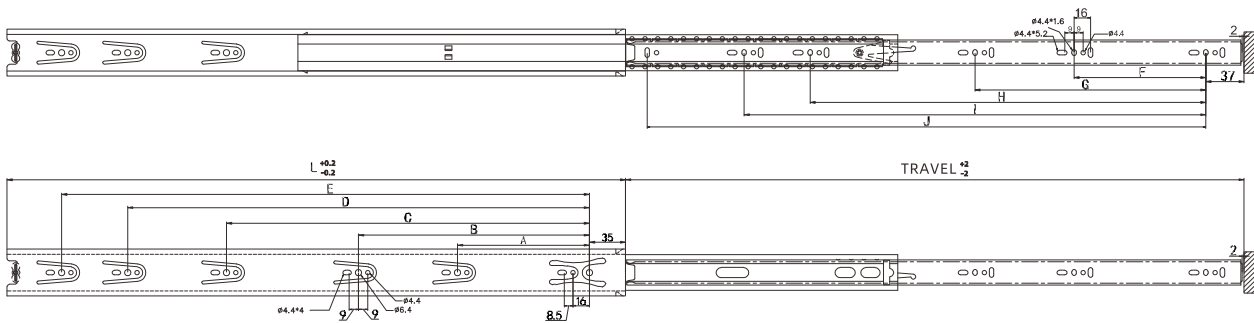


序号	L	A	B	C	D	E	F	G	H	I	J	TRAVEL
8"	200	96									142	194
10"	250	128									192	250
12"	300	128	224								242	300
14"	350	128	224				128				292	350
16"	400	128	224	320			128				342	400
18"	450	128	224	352			128	320			392	450
20"	500	128	224	352	416		128	192	352		442	500
22"	550	128	224	352	448		128	224	416		492	550
24"	600	128	224	352	448	512	128	224	416		542	600
26"	650	128	224	352	448	544	128	224	416	512	592	650
28"	700	128	224	352	448	608	128	224	416	576	642	700



■ 35mm三节滑轨
材料:冷轧钢 1.0/1.0/1.2
规格:250mm-900mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 35mmFul-extension Slide
Material: Cold rolled steel 1.0/1.0/1.2
Specifications: 250mm-900mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

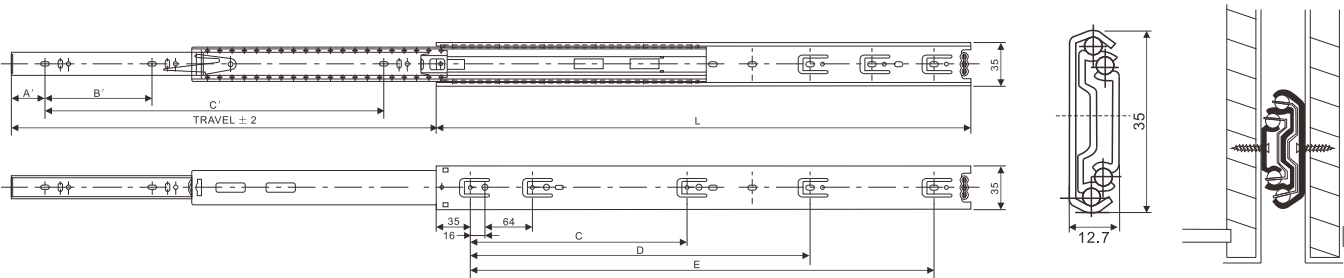


	L	C	D	E	A'	B'	C'	TRAVEL±2
10"	250	160			35	160		250
12"	300	192			35	64	224	300
14"	350	224			35	96	256	350
16"	400	224	288		35	128	320	400
18"	450	224	352		35	128	352	450
20"	500	224	352	416	35	160	416	500
22"	550	224	352	416	35	192	448	550
24"	600	224	352	480	35	192	512	600
26"	650	224	352	544	35	224	544	650
28"	700	224	352	544	35	288	608	700



■ 35mm三节缓冲滑轨
材料:冷轧钢 1.2/1.2/1.5
规格:350mm-600mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 35mm Small soft closing ball bearing slide
Material: Cold rolled steel 1.2/1.2/1.5
Specifications: 250mm-600mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

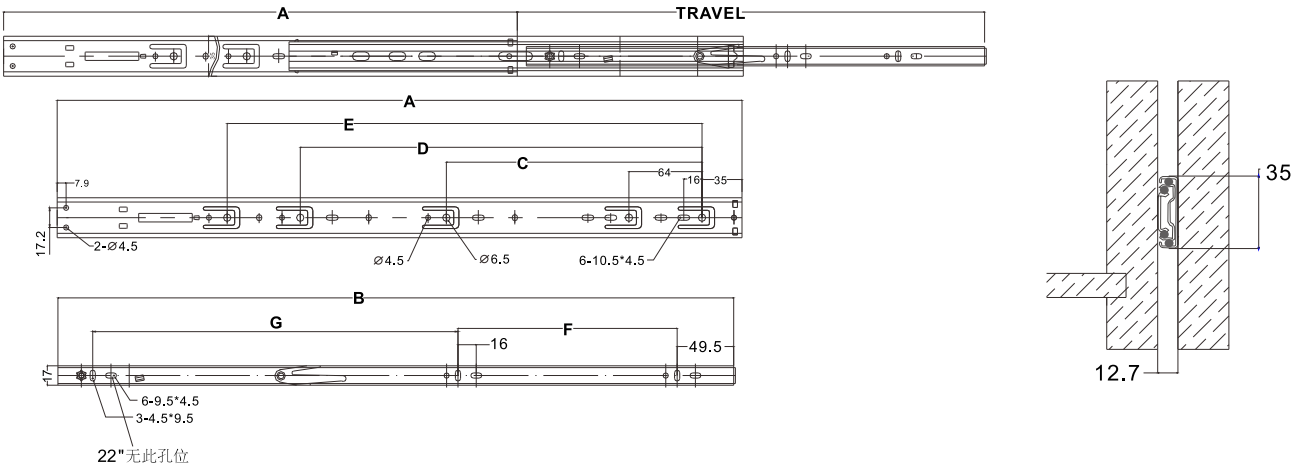

POS.	A	B	C	D	E	F	G	TRAVEL	A
1									
2	350	346	160			96	160	350	14"
3	400	396	192			128	192	400	16"
4	450	446	224			128	224	450	18"
5	500	496	224	288		160	256	500	20"
6	550	546	224	352		192	256	550	22"
7	600	596	224	352	416	192	320	600	24"




45mm按弹缓冲三节滑轨

材料:冷轧钢1.2/1.2/1.5
规格:250mm-600mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

45mm Push Open Hydraulic Full-extension Slide

Material:steel1.2/1.2/1.5
Specifications:250mm-600mm
Load weight: 45kg/450mm
Surface treatment: Zinc, Black
Installation clearance: 12.7mm+0.2mm

规格说明 SPECIFICATIONS

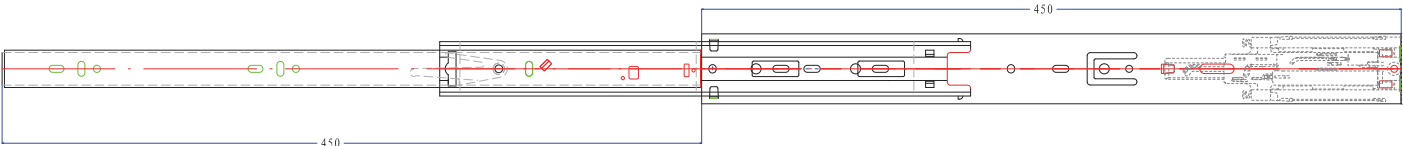

POS.	A	TRAVEL	B	C	D	F	G	A
1	250	160	245.3			160		10"
2	300	260	295.3			64	128	12"
3	350	350	345.3			96	160	14"
4	400	400	395.3	192		128	160	16"
5	450	450	445.3	224		160	192	18"
6	500	500	495.3	224	288	160	224	20"
7	550	550	545.3	224	288	192	256	22"
8	600	600	595.3	224	352	192	288	24"






45mm反弹三节滑轨

材料:冷轧钢
规格:250mm-700mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

Three-fold push open slide

Material: Cold rolled steel
Specifications: 250mm-900mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

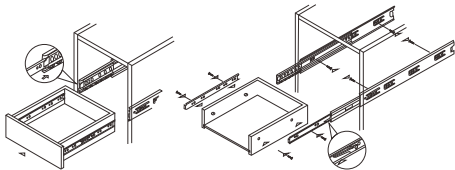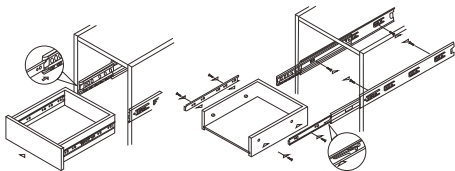


45mm双弹簧缓冲滑轨

材料:冷轧钢
规格:250mm-700mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

45MM SOF-CLOSING BALL BEARING SLIDE



Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



KD35





- **35mm三节卡式滑轨**
材料:冷轧钢
规格:250mm-700mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm
- **35mm Full-extension Slide With Hook System**
Material: Cold rolled steel
Specifications: 250mm-900mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



KD3502





- **35mm卡式缓冲三节滑轨**
材料:冷轧钢
规格:250mm-700mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm
- **35mm Soft Closing Slide With Hook System**
Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



KD4512





- **45mm卡式缓冲三节轨**
材料:冷轧钢
规格:250mm-700mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm
- **45mm Soft Closing Slide With Hook System**
Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm




KD4513



- **45mm三节反弹卡式滑轨**
材料:冷轧钢
规格:250mm-700mm
负载重量:35kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm
- **45mm Push-open Ball Bearing Slide With Hook System**
Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 35kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



4510




■ 45mm底装三节滑轨

材料:冷轧钢
规格:250mm-700mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 45mm Bottom Mounting Full-extension Slide

Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 45kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm


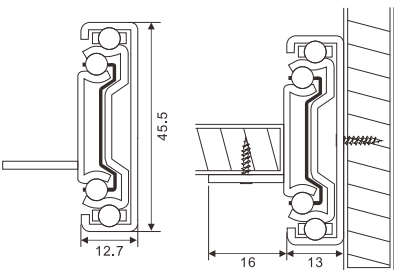


■ 45mm三节卡式滑轨

材料:冷轧钢
规格:250mm-700mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm


■ 45mm Full-extension Slide With Hook System

Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



KD45

2701




■ 27mm 二节滑轨

材料:冷轧钢
规格:250mm-600mm
负载重量:15kg/450mm
表面处理:镀锌, 黑色
安装间隙:9.8mm+0.2mm

■ 27mm 3/4 extension slide

Material: Cold rolled steel
Specifications: 250mm-600mm
Load weight: 15kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 9.8mm+0.2mm




■ 27mm 键盘滑轨

材料:冷轧钢
规格:300mm-400mm
负载重量:15kg/350mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 27mm keyboard slide

Material: Cold rolled steel
Specifications: 300mm-400mm
Load weight: 15kg/350mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



■ 35mm 二节键盘滑轨

材料:冷轧钢
规格:300mm-400mm
负载重量:25kg/350mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 35mm keyboard slide

Material: Cold rolled steel
Specifications: 300mm-400mm
Load weight: 25kg/350mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm

2703



3503

4511



■ 45mm自锁三节滑轨
材料:冷轧钢
规格:250mm-700mm
负载重量:45kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ 45mm Full-extension ball bearing slide
With self closing system
Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 45kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm


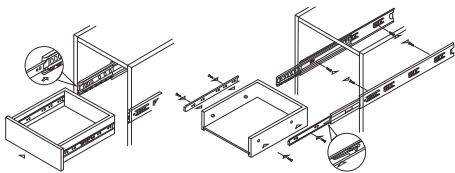


3501



■ 35mm 二节滑轨
材料:冷轧钢
规格:300mm-600mm
负载重量:25kg/450mm
表面处理:镀锌, 黑色
安装间隙:9.8mm+0.2mm

■ 3/4 extension slide
Material: Cold rolled steel
Specifications: 300mm-600mm
Load weight: 25kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 9.8mm+0.2mm




5101



■ 三节重型滑轨
材料:冷轧钢
规格:250mm-750mm
负载重量:60kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■ Heavy Duty Full Extension Drawer Slide
Material: Cold rolled steel
Specifications: 250mm-750mm
Load weight: 60kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm




5301



■ 三节重型滑轨
材料:冷轧钢
规格:250mm-1050mm
负载重量:110kg/450mm
表面处理:镀锌, 黑色
安装间隙:19.1mm+0.7mm

■ Heavy Duty Full Extension Slide
Material: Cold rolled steel
Specifications: 250mm-1050mm
Load weight: 110kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 19.1mm+0.7mm






■三节带锁重型滑轨

材料:Q235冷轧钢
规格:250mm-700mm
负载重量:60kg/450mm
表面处理:镀锌
安装间隙:12.7mm+0.2mm

■3-Section Drawer Slide With Lock

Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 60kg/450mm
Surface treatment: Zinc plated
Installation clearance: 12.7mm+0.2mm




■三节重型滑轨

材料:冷轧钢
规格:300mm-900mm
负载重量:225kg/450mm
表面处理:镀锌, 黑色
安装间隙:19.5mm+0.3mm

■Heavy Duty IndustrialFull ExtensionDrawer Slide

Material: Cold rolled steel
Specifications: 300mm-900mm
Load weight: 225kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 19.5mm+0.3mm




■三节缓冲重型滑轨

材料:冷轧钢
规格:250mm-700mm
负载重量:60kg/450mm
表面处理:镀锌, 黑色
安装间隙:12.7mm+0.2mm

■3-Section Heavy-duty Soft close Slide


Material: Cold rolled steel
Specifications: 250mm-700mm
Load weight: 60kg/450mm
Surface treatment: Zinc plated, black
Installation clearance: 12.7mm+0.2mm



双拉力弹簧阻尼器

该阻尼器是分左右设计的, 可以使抽屉安静, 平稳的自动关闭性能!

Double spring damper designThis damper is designed separately fromleft to right which can be closed silently andsmoothly.automatic closing performance!

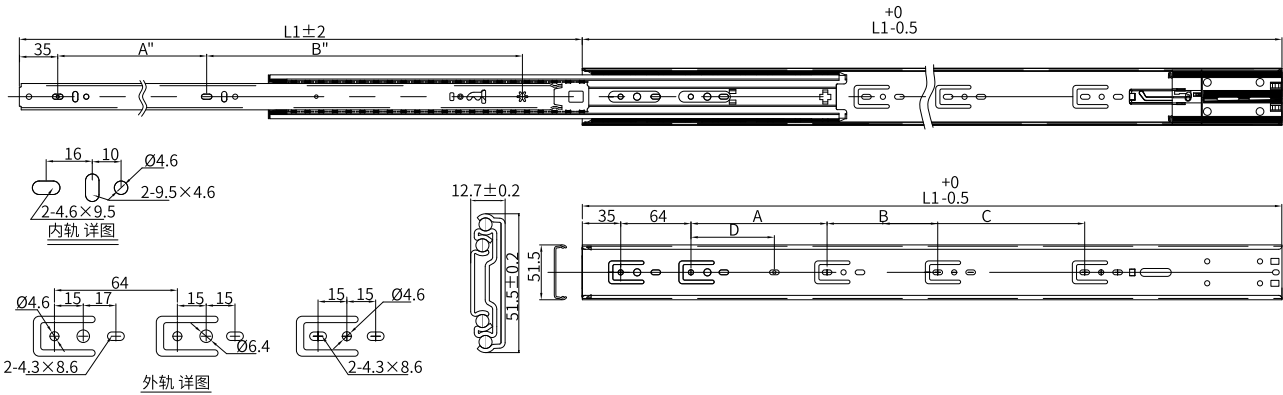


DS001



■ FGV款喷粉滑轨
材料:冷轧钢
尺寸:250mm-600mm
厚度:1.2mm、1.0mm、0.8mm
承重:25公斤(1.2mm)
颜色:白色、象牙白、棕色、黑色或根据要求

■ Drawer slide, Self-closing, Bottom mounting
Material: Cold rolled steel
Size: 250mm-600mm
Thickness: 1.2mm, 1.0mm, 0.8mm
Load Rating: 25kg(1.2mm)
Color: White, Ivory, Brown, Black or as Required

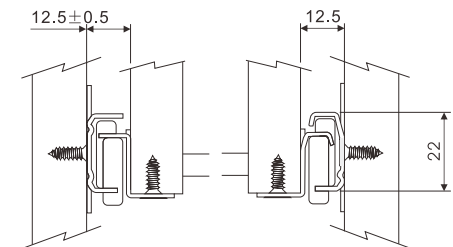


DS002



■ 欧式款喷粉滑轨
材料:冷轧钢
尺寸:250mm-600mm
厚度:1.2mm、1.0mm、0.8mm
承重:25公斤(1.2mm)
颜色:白色、象牙白、棕色、黑色或根据要求

■ Drawer slide, Euro type, Self-closing, Bottom mounting
Material: Cold rolled steel
Size: 250mm-600mm
Thickness: 1.2mm, 1.0mm, 0.8mm
Load Rating: 25kg(1.2mm)
Color: White, Ivory, Brown, Black or as Required

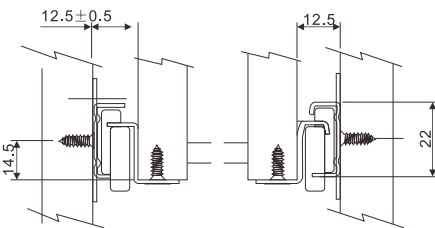


DS011



■ 喷粉侧板滑轨
材料:冷轧钢
厚度:1.2mm
承重:25kg/450mm
颜色:白色、象牙色、黑色或根据要求定制

■ Metal box slide
Material: Cold rolled steel
Thickness: 1.2mm
Load Rating: 25kg/450mm
Color: White, Ivory, Black or as required.

Item	Height	Length
DS-011	86mm	300,350,400,450,500,550mm
DS-012	118mm	
DS-013	150mm	




DS011S



■ 喷粉侧板缓冲滑轨
材料:冷轧钢
厚度:1.2mm
承重:25kg/450mm
颜色:白色、象牙色、黑色或根据要求定制

■ Soft closing metal box slide
Material: Cold rolled steel
Thickness: 1.2mm
Load Rating: 25kg/450mm
Color: White, Ivory, Black or as required.

Item	Height	Length
DS-011S	86mm	300,350,400,450,500,550mm
DS-012S	118mm	
DS-013S	150mm	






二节缓冲隐藏轨

材料:镀锌板
规格:250mm-600mm
负载重量:25kg/450mm
适用范围:16mm板/18mm板
调节: 插销/普通把手/2D把手

3/4 extension Concealed Soft Closing Slide

Material: Galvanized sheet
Specifications: 250mm-600mm
Load weight: 25kg/450mm
Applicable to: 16mm plate/18mm plate
Adjustment: Pin/1D/2D




二节反弹隐藏轨

材料:镀锌板
规格:250mm-600mm
负载重量:25kg/450mm
适用范围:16mm板/18mm板
调节: 插销/普通把手/2D把手

Push-open Concealed Slide

Material: Galvanized sheet
Specifications: 250mm-600mm
Load weight: 25kg/450mm
Applicable to: 16mm plate/18mm plate
Adjustment: Pin/1D/2D



三节缓冲隐藏轨

材料: 镀锌板1.8/1.4/1.0
规格: 250mm-600mm
负载重量: 35kg/450mm
适用范围: 16mm板/18mm板
调节: 插销/普通把手/2D把手/3D把手

Full-Extension Concealed Soft Closing Slide

Material:Galvanized 1.8/1.4/1.0
Specifications: 250mm-600mm
Load weight: 35kg/450mm
Scope: 16mm plate/18mm plate
Regulate: Pin/1D/2D/3D




三节同步缓冲隐藏轨

材料: 镀锌板1.8/1.4/1.0
规格: 300mm-600mm
负载重量: 35kg/450mm
适用范围: 16mm板/18mm板
调节: 插销/普通把手/2D把手/3D把手

Full-extension Concealed Soft Closing Slide (Drawer slides synchronous)

Material:Galvanized 1.8/1.4/1.0
Specifications: 300mm-600mm
Load weight: 35kg/450mm
Scope: 16mm plate/18mm plate
Regulate: Pin/1D/2D/3D

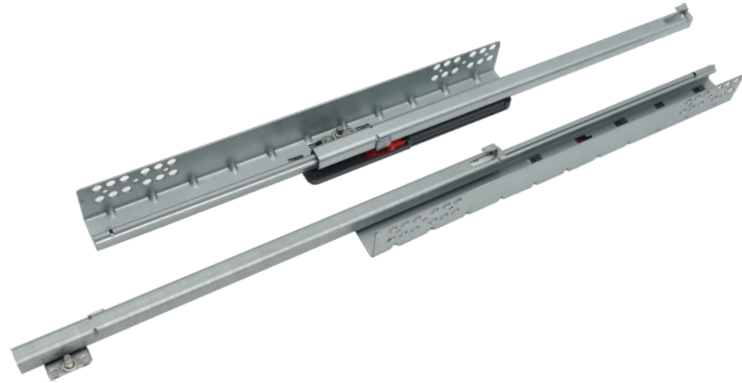

■ 二节插销缓冲隐藏轨

材料：镀锌板1.4/1.4
规格：250MM-550MM
负载重量：25KG/450MM
适用范围：16MM板/18MM板
功能：缓冲/反弹/卡扣

- 2-fold soft closing under mounted slide with bolt

Material:Galvanized 1.4/1.4
Specifications: 250MM-550MM
Load weight: 25KG/450MM
Scope: 16MM plate/18MM plate
FUNCTION: SOFT CLOSE/PUSH OPEN/CLIP ON





■ V2款二节缓冲隐藏轨

材料：镀锌板1.4/1.4
规格：250MM-550MM
负载重量：25KG/450MM
适用范围：16MM板/18MM板
调节：缓冲/反弹/卡扣

- 2-fold soft closing under mounted slide with 1D handle

Material: Galvanized 1.4/1.4
Specifications: 250MM-550MM
Load weight: 25KG/450MM
Scope: 16MM plate/18MM plate
Regulate: SOFT CLOSE/PUSH OPEN/CLIP ON

滑轨安装尺寸 Installation Dimension

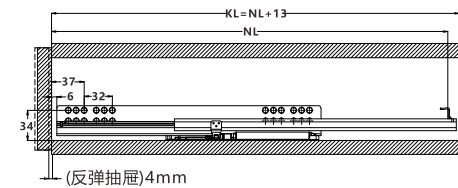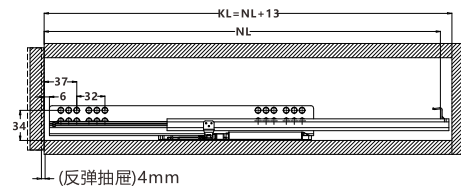


滑軌安裝尺寸 Installation Dimension

滑轨安装孔位置 Hole Pattern

SL(mm)	NL(mm)	KL(mm)	C(mm)	PL(mm)
250	247	260	188.5	184
300	297	310	188.5	234
350	347	360	221.5	272
400	397	410	249.5	310
450	447	460	283.5	348
500	497	510	309.5	386
550	547	560	338.5	436


SL=滑轨尺寸 Slide Length C=调节钉孔位尺寸 PIN Position
NL=基本长度 DrawerLength PL=拉出长度Travel Extension
KL=柜体净深 Min.Cabinet Depth

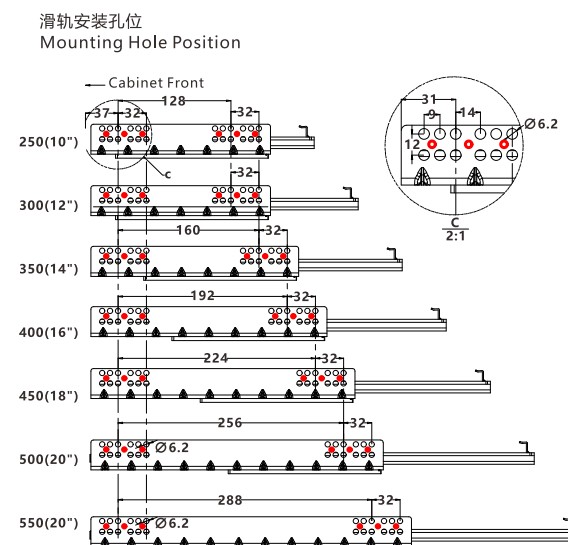


滑轨安装孔位置 Hole Pattern

SL(mm)	NL(mm)	KL(mm)	PL(mm)	
250	247	260	182	
300	297	310	232	
350	347	360	270	
400	397	410	306	
450	447	460	346	
500	497	510	384	
550	547	560	434	

SL=滑轨尺寸 Slide Length NL=基本长度 DrawerLength
PL=拉出长度 Travel Extension KL=柜体净深 Min.Cabinet Depth

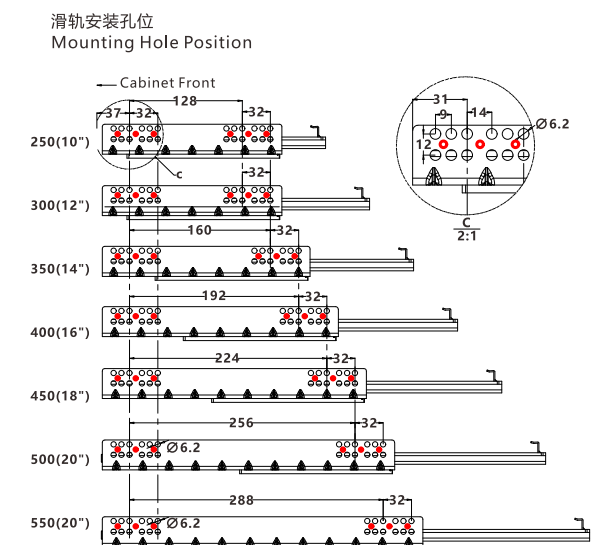

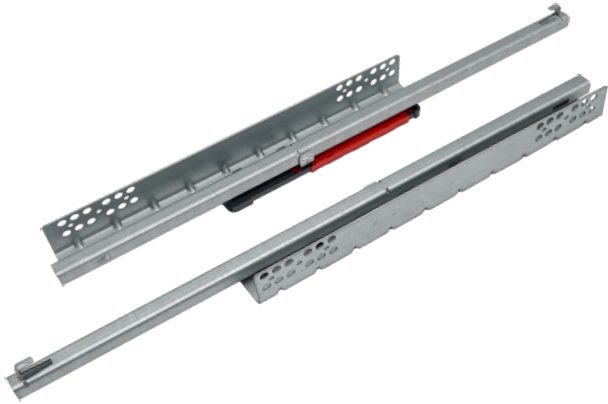


V2款二节反弹隐藏轨
材料：镀锌板1.4/1.4
规格：300MM-500MM
负载重量：30kg/450mm
适用范围：16MM板/18MM板
调节：缓冲/反弹/卡扣
海蒂诗安装孔位


3/4 Extension Push Open Concealed Slide
Material:Galvanized 1.4/1.4
Specifications: 300MM-500MM
Load weight: 25kg/450mm
Scope: 16MM plate/18MM plate
Regulate: SOFT CLOSE/PUSH OPEN/CLIP ON
HETTICH MOUNTING HOLE

滑轨安装尺寸 Installation Dimension

外置抽屉
Standard Drawer

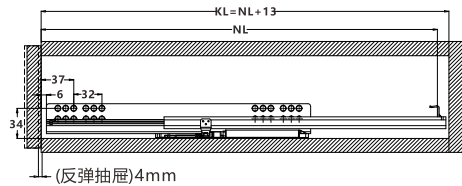

内置抽屉
Inner Drawer

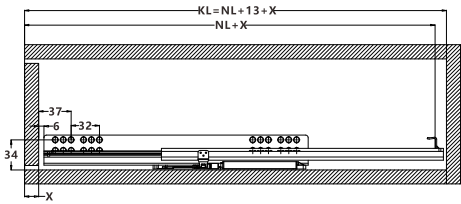


滑轨安装孔位置 Hole Pattern

SL(mm)	NL(mm)	KL(mm)	PL(mm)	
250	247	260	182	
300	297	310	232	
350	347	360	270	
400	397	410	306	
450	447	460	346	
500	497	510	384	
550	547	560	434	

SL=滑轨尺寸 Slide Length NL=基本长度 DrawerLength
PL=拉出长度Travel Extension KL=柜体净深 Min.Cabinet Depth

滑轨安装孔位
Mounting Hole Position

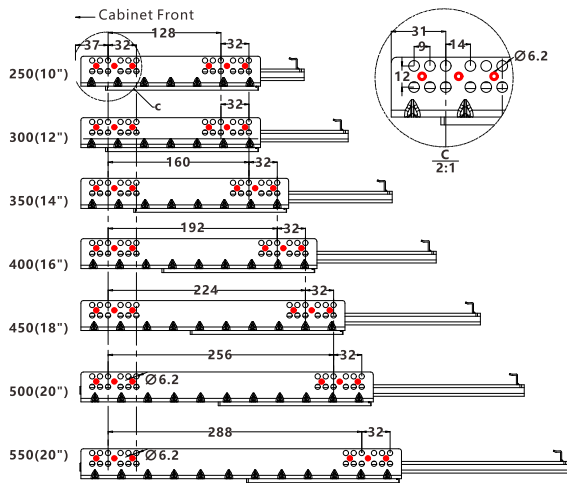


V6款三节缓冲隐藏轨
材料：镀锌板1.4/1.4/1.4
规格：300MM-500MM
负载重量：30KG/450MM
适用范围：16MM板/18MM板
功能：缓冲/反弹
调节：插销/把手
海蒂诗安装孔位


Full-Extension Concealed Soft Closing Slide
Material:Galvanized 1.4/1.4/1.4
Specifications: 300MM-500MM
Load weight: 30KG/450MM
Scope: 16MM plate/18MM plate
Feature: push-open/soft closing
Regulate: Pin/Handle
HETTICH MOUNTING HOLE

滑轨安装尺寸 Installation Dimension

外置抽屉
Standard Drawer

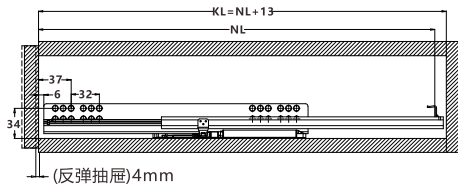


内置抽屉
Inner Drawer

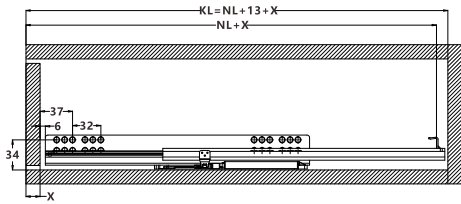


滑轨安装孔位置 Hole Pattern

设计尺寸
Extension



SL(mm)	NL(mm)	KL(mm)	C(mm)	PL(mm)
250	253	290	205	234
300	303	337	255	284
350	353	363	305	334
400	403	413	355	384
450	453	463	405	434
500	503	513	455	484
550	553	563	505	534

SL=滑轨尺寸 Slide Length C=调节钉孔位尺寸 PIN Position
NL=基本长度 DrawerLength PL=拉出长度Travel Extension
KL=柜体净深 Min.Cabinet Depth

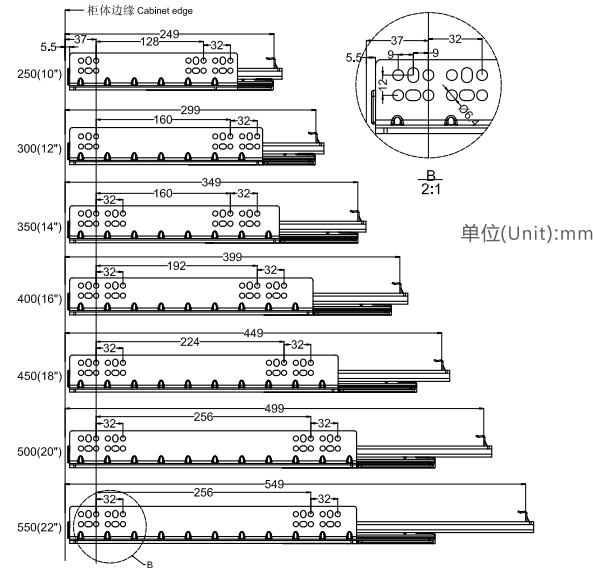



■ 三节缓冲隐藏轨

材料：镀锌板1.8/1.4/1.0
规格：300MM-500MM
负载重量：35KG/450MM
适用范围：16MM板/18MM板
调节：插销/普通把手/2D把手/3D把手

■ 3/4 Extension Soft Closing Concealed Slide

Material:Galvanized 1.8/1.4/1.0
Specifications: 300MM-500MM
Load weight: 35KG/450MM
Scope: 16MM plate/18MM plate
Regulate: Pin/1D/2D/3D




■ V6款三节反弹隐藏轨

材料：镀锌板1.4/1.4/1.4
规格：300MM-700MM
负载重量：30KG/450MM
适用范围：16MM板/18MM板
功能：反弹
调节：插销/把手

■ Clip Full Extension Push Open Under Mounted Slide For 18mm Board

Material:Galvanized 1.4/1.4/1.4
Specifications: 300MM-700MM
Load weight: 30KG/450MM
Scope: 16MM plate/18MM plate
Feature: push-open
Regulate: Pin/Handle

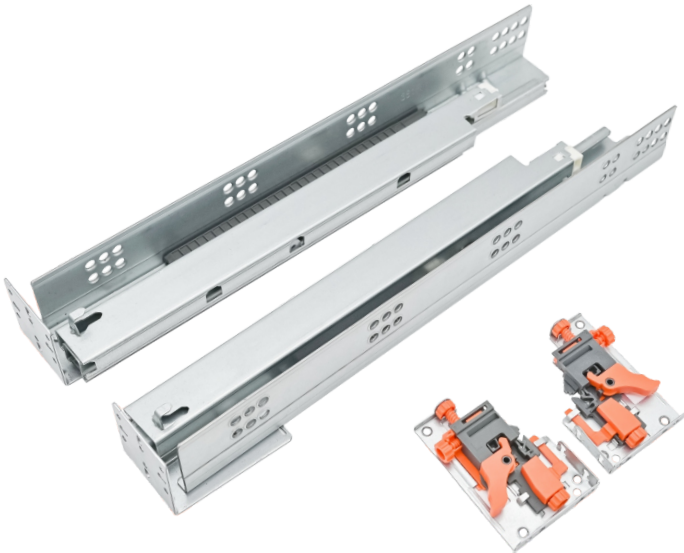

■ 美式三节缓冲隐藏轨

材料：镀锌板1.8/1.4/1.0
规格：300MM-500MM
负载重量：35KG/450MM
适用范围：16MM板/18MM板
调节：插销/普通把手/2D把手/3D把手

■ American Style Full-Extension Concealed Soft Closing Slide

Material:Galvanized 1.8/1.4/1.0
Specifications: 300MM-500MM
Load weight: 35KG/450MM
Scope: 16MM plate/18MM plate
Regulate: Pin/1D/2D/3D



■ 自锁式隐藏轨

材料：镀锌板1.0/1.0
规格：250MM-950MM
负载重量：25KG
适用范围：16MM板
功能：卡扣式

■ Self-locking Concealed Closing Slide

Material:Galvanized 1.0/1.0
Specifications: 250MM-950MM
Load weight: 25KG
Scope: 16MM plate
Feature:clip-on installation

DS014D



- **超薄邦骑马抽**
材料：冷轧钢+镀锌板
规格：350MM-550MM
高度：88/120/152/167/185/201 MM
颜色：白灰色/铁灰色/白亮光
适用范围：16MM板/18MM板
负载重量：35KG/450MM
特性：同步隐藏 全拉出
- **Soft Closing Riding Drawer, Thin Type**
Material: cold rolled steel + galvanized sheet
Specifications: 350MM-550MM
Height: 88/120/152/167/185/201MM
Color: white gray/iron gray/white gloss
Scope : 16MM board/18MM board
Load weight: 35KG/450MM
Features: Synchronous hiding, full pull-out

DS014E



- **三节同步隐藏轨超薄邦骑马抽**
材料：冷轧钢+镀锌板
规格：300MM-550MM
高度：89/121/174MM
颜色：铁灰色/白亮光
适用范围：16MM板/18MM板
负载重量：35KG/450MM
特性：同步隐藏 全拉出
一键脱离装置 快速安装与拆卸
- **Synchronous Concealed Slide**
Material: cold rolled steel + galvanized sheet
Specifications: 300MM-550MM
Height: 89/121/174MM
Color: iron gray/white gloss
Scope : 16MM board/18MM board
Load weight: 35KG/450MM
Features: Synchronous hiding, full pull-out
One-click Release Device Fast installation

DS020




- **二节隐藏轨超薄邦骑马抽**
材料：冷轧钢+镀锌板
规格：250MM-550MM
负载重量：30KG/450MM
适用范围：16MM板/18MM板
海蒂诗安装孔位
- **3/4 Extension Soft Closing Riding Drawer**
Material: Cold rolled steel + galvanized sheet
Specifications: 250MM-450MM
Load weight: 30KG/450MM
Scope: 16MM plate/18MM plate
HETTICH MOUNTING HOLE

DS021



- **二节隐藏轨极薄骑马抽**
材料：冷轧钢+镀锌板
规格：250MM-550MM
负载重量：30KG/450MM
适用范围：16MM板/18MM板
海蒂诗安装孔位
- **3/4 Extension Soft Closing riding Drawer, Thin Type**
Material: Cold rolled steel + galvanized sheet
Specifications: 250MM-450MM
Load weight: 30KG/450MM
Scope: 16MM plate/18MM plate
HETTICH MOUNTING HOLE

DS015

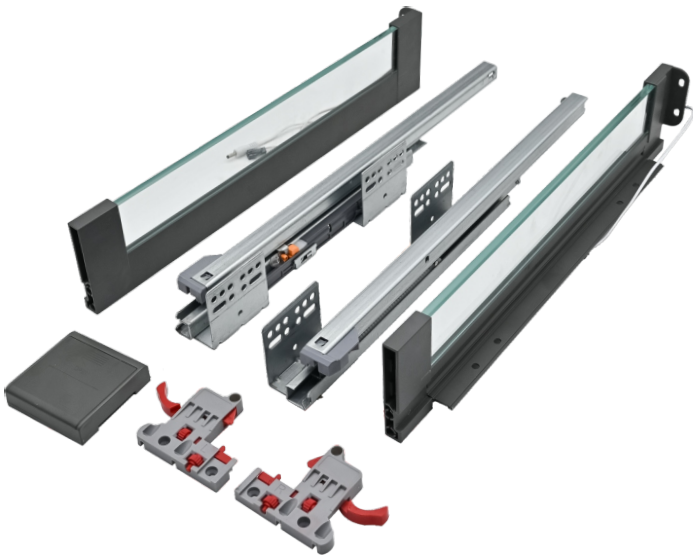

- LED发光玻璃骑马抽
材料：冷轧钢+镀锌板+玻璃
长度：300-550MM
负载重量：35KG/450MM
侧邦高度：93/130/177
包装规格：4套/箱
- LED Light Kitchen Cabinet Soft Close Tandem Box Drawer Slides With Glass
Material: cold rolled steel + galvanized sheet+glass
Length : 300-550MM
Maximum load : 35KG/450MM
Height: 93/130/177mm
Packing:4sets/CTN

DS018




- 极薄邦缓冲骑马抽
材料：冷轧钢+镀锌板
规格：250MM-550MM
负载重量：30KG/450MM
适用范围：16MM板/18MM板
- Soft closing riding drawer, thin type
Material: Cold rolled steel + galvanized
Specifications: 250MM-550MM
Load weight: 30KG/450MM
Scope: 16MM plate/18MM plate

DS014



- 缓冲骑马抽
材料：冷轧钢+镀锌板
规格：270MM-550MM
负载重量：35KG/450MM
适用范围：16MM板




- Soft Closing Riding Drawer
Material: cold rolled steel+ galvanized sheet
Specifications: 270MM-550MM
Load weight: 35KG/450MM
Scope: 16MM plate

DS014-B



- 加高杆缓冲骑马抽
材料：冷轧钢+镀锌板
规格：270MM-550MM
负载重量：35KG/450MM
适用范围：16MM板




- Soft Closing Riding Drawer With One Bar
Material: cold rolled steel+ galvanized sheet
Specifications: 270MM-550MM
Load weight: 35KG/450MM
Scope: 16MM plate

DS0142-B



- 加高杆缓冲骑马抽
材料：冷轧钢+镀锌板
规格：270MM-550MM
负载重量：35KG/450MM
适用范围：16MM板



- Soft Closing Riding Drawer With One Bar
Material: cold rolled steel+ galvanized sheet
Specifications: 270MM-550MM
Load weight: 35KG/450MM
Scope: 16MM plate

SFD005




■ 油压支撑

材料：锌合金
表面处理：镀镍，镀铬
包装：100支/箱
三种款式对应三种安装效果
可通过 * 调节螺丝达到最佳效果

■ Soft down stay

Material: zinc alloy
Finish: Nickel plated, Chrome plated
Packing: 100pcs
3 Model for 3 installation results
Notice: adjust*screws to attain the best result

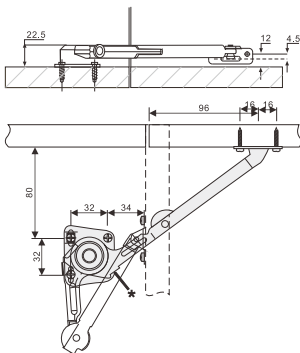

DS018




■ 机械式支撑

材料：铁，锌合金
表面处理：镀镍
包装：100支/箱
可通过 * 调节螺丝达到最佳效果

■ Soft down stay

Material: steel, zn-alloy,
Finish: Nickel plated
Packing: 100pc
Notice: adjust*screws to attain the best result

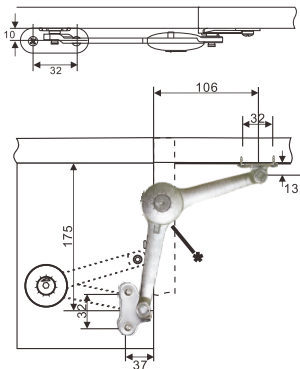

SFD026



■ 缓冲支撑

材质：电解板+塑料+铝+铁
最大承重：6公斤
可选：上翻木门和铝框门
安装柜深度：>240毫米

■ Soft closing cabinet stay

Material: electrolytic plate
+ plastic + aluminum + Iron
Max weight: 6kg
Available: Up-turning wooden door
and aluminum-frame door
Installation cabinet deep: >240mm

SFD031



■ 快拆缓冲支撑

材质：锌合金+塑料
表面处理：镀镍

■ Soft closing cabinet stay, clip-on mounting plate

Material: Zinc alloy + plastic
Finish: Nickel plated


SFD007A/B/C



■ 气压支撑
包装：100支/箱
已通过5万次测试

■ Gas Press Stay
Packing: 100pcs
Already passed 50000 cycles test

SFD007-1A/B/C

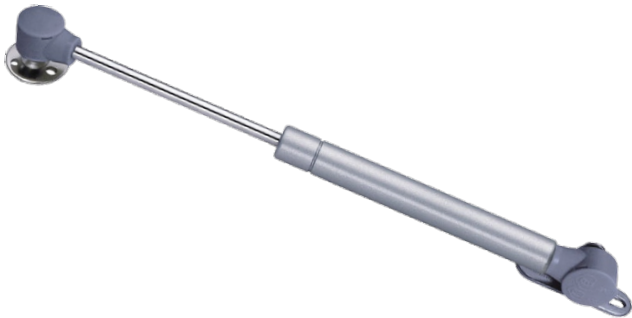

■ 气压支撑
包装：100支/箱
已通过5万次测试

■ Gas Press Stay
Packing: 100pcs
Already passed 50000 cycles test

SFD007-3A/B/C



■ 气压支撑
包装：100支/箱
已通过5万次测试

■ Gas Press Stay
Packing: 100pcs
Already passed 50000 cycles test




SFD007-S



■ 气压缓冲支撑
包装：100支/箱
已通过5万次测试
推力:50N-150N

■ Soft closing gas spring
Packing: 100pcs
power: 50N-150N
Already passed 50000 cycles test


SFD008

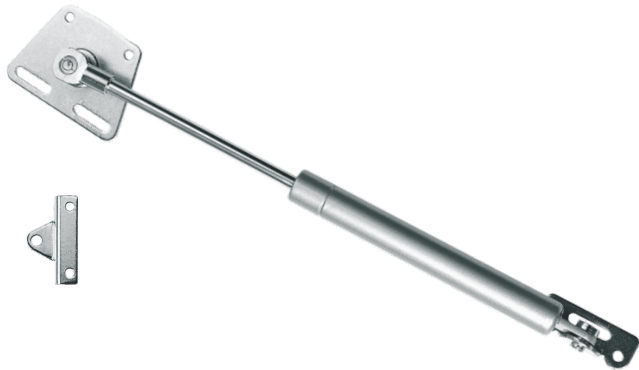

■ 气压支撑
包装：100支/箱
已通过5万次测试

■ Gas Press Stay
Packing: 100pcs
Already passed 50000 cycles test


EF1501



Φ15 偏心连接件
材质: 锌合金
表面处理: 镀锌、镀镍
包装: 2500个

Φ15 Connected cam
Material: Zn-alloy
Finish: Zn-Plated, nickel plated
Packing: 2500pcs

Item	Φ	H	H1	Board Thickness
EF1501-1	15	7.5	12	15~16mm
EF1501-2	15	9	13.5	18~19mm

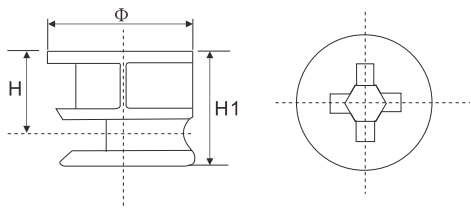


EF1502



Φ15 偏心连接件
材质: 锌合金
表面处理: 镀锌、镀镍
包装: 1000个

Φ15 Connected cam
Material: Zn-alloy
Finish: Zn-Plated, nickel plated
Packing: 1000pcs

Item	Φ	H	H1	Board Thickness
EF1502-1	15	7.5	12	15~16mm
EF1502-2	15	9	13.8	18~19mm

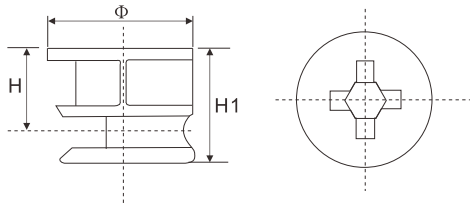


EF1504




Φ15 偏心连接件
材质: 锌合金
表面处理: 镀锌、镀镍
包装: 3000个

Φ15 Connected cam
Material: Zn-alloy
Finish: Zn-Plated, nickel plated
Packing: 3000pcs

Item	Φ	H	H1	Board Thickness
EF1504-1	15	8	12.3	15~16mm
EF1504-3	15	9	17	22~25mm

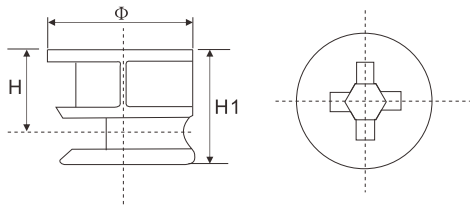


EF1505



Φ15 偏心连接件
材质: 锌合金
表面处理: 镀锌、镀镍
包装: 3000个

Φ15 Connected cam
Material: Zn-alloy
Finish: Zn-Plated, nickel plated
Packing: 3000pcs

Item	Φ	H	H1	Board Thickness
EF1505-1	15	7.5	12	15~16mm
EF1505-2	15	9	13.5	18~19mm

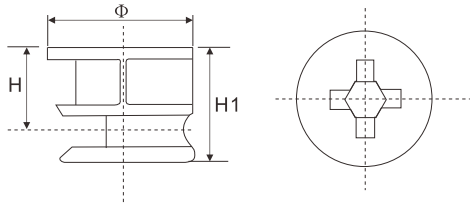


EF1511




拆装螺杆
材质: 锌合金
表面处理: 镀锌
包装: 2500个

Connected bolt
Material: Zn-alloy
Finish: Zn-Plated
Packing: 2500pcs

Item	L	L1	M
EF1511-1	24	8	M6
EF1511-2	28	8	M6
EF1511-3	34	8	M6



EF1513




拆装螺杆
材质: 铁
表面处理: 镀锌
包装: 2500个

Connected bolt
Material: Iron
Finish: Zn-Plated
Packing: 2500pcs

Item	L	L1	Φ
EF1513-1	24	8/11	6
EF1513-2	34	8/11	6



EF1514




拆装螺杆
材质: 铁, 塑料
表面处理: 镀锌
包装: 5000个

Connected bolt
Material: Iron, Plastic
Finish: Zn-Plated
Packing: 5000pcs

Item	L	L1	Φ
EF1514-1	24	10	8
EF1514-2	32	10	8



EF1515

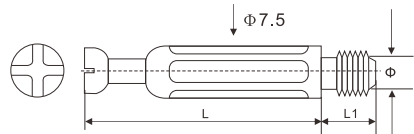


拆装螺杆
材质: 铁, 塑料
表面处理: 镀锌
包装: 2500个

Connected bolt
Material: Iron, Plastic
Finish: Zn-Plated
Packing: 2500pcs

Item	L	L1	Φ1	Φ
EF1515-1	24	8	6	7.5
EF1515-2	32	8	6	7.5



EF1518

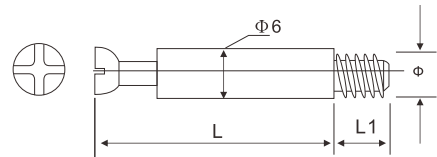


拆装螺杆
材质: 铁
表面处理: 镀锌
包装: 2500个

Connected bolt
Material: Iron
Finish: Zn-Plated
Packing: 2500pcs

Item	L	L1	Φ
EF1518-1	24	11	6
EF1518-2	34	11	6



EF1519



拆装螺杆
材质: 铁
表面处理: 镀锌
包装: 1000个

Connected bolt
Material: Iron
Finish: Zn-Plated
Packing: 1000pcs

Item	L	L1
EF1519-1	64	24
EF1519-2	67	24
EF1519-3	84	34
EF1519-4	87	34




EF1520



拆装螺栓
材质：铁
表面处理：镀锌
包装：1000个

Connected bolt
Material: Iron
Finish: Zn-Plated
Packing: 1000pcs

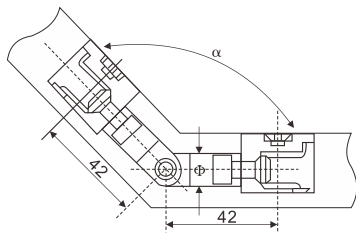


EF1521



拆装螺栓
材质：铁
表面处理：镀锌
包装：2000个

Connected bolt
Material: Iron
Finish: Zn-Plated
Packing: 2000pcs




EF1522



拆装螺栓
材质：铁、塑料
表面处理：镀锌
包装：2500个

Connected bolt
Material: Iron、Plastic
Finish: Zn-Plated
Packing: 2500pcs

Item	L	L1	Φ
EF1511-1	24	8	6
EF1511-2	28	8	6
EF1511-3	34	8	6

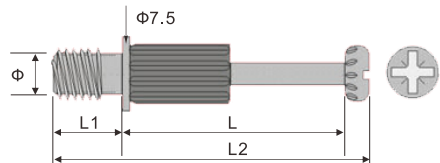


EF1525



拆装螺栓
材质：锌合金
表面处理：镀锌
包装：2500个

Connected bolt
Material: Zn-alloy
Finish: Zn-Plated
Packing: 2500pcs

Item	L	L1	Φ
EF1525-1	24	8	6
EF1525-2	34	8	6

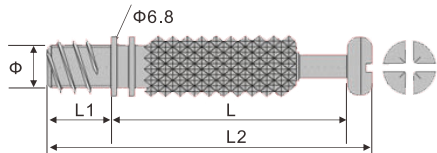


CCF015




偏心连接件塑料盖板
材质：塑料
颜色：白/黑/棕
包装：10000个

Cover Cap
Material: Plastic
Color: White/Black/Brown
Packing: 10000pcs

Item	Φ	Φ1
CCF015-1	17.5	4
CCF015-2	18	4

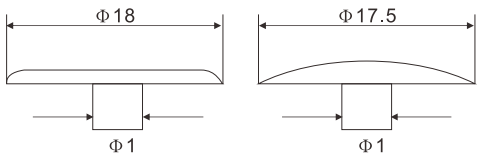

EN002




预埋螺母
材质：尼龙
颜色：白/棕/黑
包装：1000个

Pre-inserted Nut
Material: Nylon
Color: White/Brown/Black
Packing: 10000sets



Item	Φ	L	M	Material
EN002-1	11	9.5	M6	Plastic
EN002-2	11	11	M6	Plastic
EN002-3	11	11	M6	Nylon

EN003




尼龙膨胀螺母
材质：尼龙
颜色：本白
包装：5000个

Nylon Expanded Nut
Material: Nylon
Color: Original Color
Packing: 5000sets




Item	Φ	L	M
EN003-1	11	11	M6
EN003-2	11	11	M6

CBN001




组合螺丝
材质：冷轧钢
表面处理：镀锌
包装：1000个

Connecting Nut With Screw
Material: steel
Finish: Zn-Plated
Packing: 1000pcs



SW001

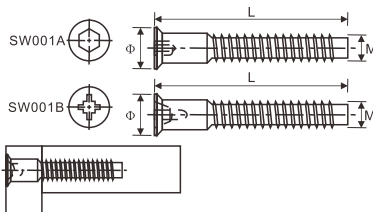


直修自攻螺丝
材质：铁
表面处理：镀锌
包装：2500个

Confirmat Screw
Material: Iron
Finish: Zn-Plated
Packing: 2500pcs



ITEM	M	L	Φ
SW001A/B-1	7	40/50/60/70	10
SW001A/B-2	6.3	40/50/60/70	9.5
SW001A/B-3	5	40/50	7

SW002

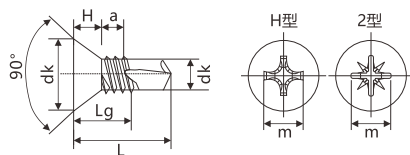

沉头钻尾螺丝
材质：铁
尺寸：长:13mm-50mm

Flat Head Self Drilling Screw
Material: Iron
Size: 13mm-50mm




拉手系列 > Hollow stainless steel handle 不锈钢空心拉手



HD301
颜色: 拉丝镍/黑/金
材质: 不锈钢
孔距: 96-544mm
长度: 156-604mm
直径: 10/12/14
包装: 100-200支/箱

HD301
Color: Brushed Nickel/Black/Gold
Material: Stainless Steel
Material: Stainless Steel
Pitch: 96-544mm
Length: 156-604mm
Diameter: 10/12/14"
Packing:100-200pcs

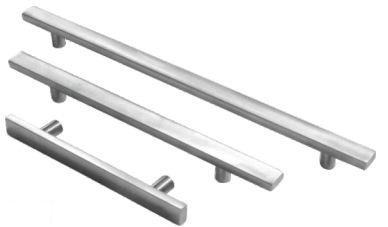

HD304
颜色: 拉丝镍/黑/金
材质: 不锈钢
孔距: 96-320mm
长度: 156-380mm
直径: 10/20
包装: 100-200支/箱

HD304
Color: Brushed Nickel/Black/Gold
Material: Stainless Steel
Material: Stainless Steel
Pitch: 96-320mm
Length: 156-380mm
Diameter: 10/20"
Packing:100-200pcs



HD307
颜色: 拉丝镍/黑/金
材质: 不锈钢
孔距: 96-384mm
直径: 12/14/16
包装: 100-200支/箱

HD307
Color: Brushed Nickel/Black/Gold
Material: Stainless Steel
Material: Stainless Steel
Pitch: 96-384mm
Diameter: 12/14/16"
Packing:100-200pcs



HD308
颜色: 拉丝镍/黑/金
材质: 不锈钢
孔距: 128-384mm
直径: 12/14/16
包装: 100-200支/箱


HD308
Color: Brushed Nickel/Black/Gold
Material: Stainless Steel
Material: Stainless Steel
Pitch: 128-384mm
Diameter: 12/14/16"
Packing:100-200pcs



HD309
颜色: 拉丝镍/黑/金
材质: 不锈钢
孔距: 160-320mm
直径: 12/14/16
包装: 240支/箱


HD309
Color: Brushed Nickel/Black/Gold
Material: Stainless Steel
Material: Stainless Steel
Pitch: 160-320mm
Diameter: 12/14/16"
Packing:240pcs

拉手系列 > Zinc alloy handle 锌合金拉手




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	L	C	H	W	Packing
HD001	116.6	96	24.8	Φ9.8	320pcs
	147.8	128	29.4	Φ9.8	320pcs




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	C	L	H	W	Packing
HD003	96	104	27.5	Φ8	320pcs




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	C	L	H	W	Packing
HD005	96	137.5	23.8	16.3	360pcs
	128	184	24	23.2	240pcs




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	C	L	H	W	Packing
HD006	96	132	26		320pcs
	128	163	29		320pcs




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	L	C	H	W	Packing
HD009	77.8	64	21.5	9.6	480pcs
	113.8	96	24	8.4	480pcs
	158.8	128	26.5	9.7	400pcs



Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	L	C	H	W	Packing
HD010	120	76	24	11.5	
	141.2	96	22.9	13.2	400pcs




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	L	C	H	W	Packing
HD011	128	96	23.7	14.7	400pcs
	157.5	128	24.3	16.4	320pcs




拉手系列 > Aluminum Handle 铝拉手

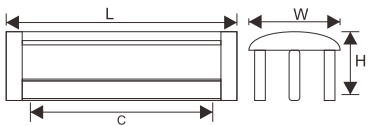

Material: Aluminium

Item	C	L	H	W	Packing
HD504	64	117	13	60	400pcs
	96	149	13	60	300pcs
	128	181	13	60	180pcs
	160	213	13	60	180pcs
	192	245	13	60	150pcs




Material: Aluminium

Item	C	L	H	W	Packing
HD523	32	40	17	12	800pcs
	64	80	17	12	600pcs
	96	120	17	12	480pcs
	128	160	17	12	400pcs
	160	200	17	12	300pcs
	192	240	17	12	300pcs




Material: Aluminium

Item	C	L	H	W	Packing
HD524	32	40	17.5	11	600pcs
	64	80	17.5	11	600pcs
	96	120	17.5	11	400pcs
	128	160	17.5	11	300pcs
	160	200	17.5	11	300pcs
	192	240	17.5	11	200pcs
	224	280	17.5	11	180pcs



Material: Aluminium


Item	C	L	H	W	Packing
HD525	32	40	17	9.2	800pcs
	64	80	17	9.2	600pcs
	96	120	17	9.2	600pcs
	128	160	17	9.2	360pcs
	160	200	17	9.2	300pcs
	192	240	17	9.2	300pcs
	224	280	17	9.2	300pcs
	288	320	17	9.2	180pcs
	256	360	17	9.2	180pcs



Material: Aluminium


Item	C	L	H	Packing
HD513A	96	103	37	300pcs
	128	135	37	300pcs
	160	167	37	240pcs
	192	199	37	240pcs
	224	231	37	180pcs

拉手系列 > Zinc alloy handle 锌合金拉手




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/Bushed Nickel/
Golden/Antique Brass/Gun Black/Painting

Item	L	C	H	W	Packing
HD012	125	96	23	11	400pcs
	162	128	23,8	13,8	320pcs




Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/
Bushed Nickel/Golden/Antique Brass/
Gun Black/Painting

Item	L	H	W	-
HD144	22,3	21,1	14,2	
	28	24,5	17,7	
	35	30	21	



Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/
Bushed Nickel/Golden/Antique Brass/
Gun Black/Painting

Item	L	B	H	W
HD098A	35,3	Ø16	27	22,5



Material: Zinc alloy
Finish: Chrome /Matt Chrome/Matt Nickel/
Bushed Nickel/Golden/Antique Brass/
Gun Black/Painting

Item	W	H	B	-
HD098B	Ø37,2	30,5	Ø16,3	
	Ø32	26,7	Ø16,3	

